


WAAS CH 81811 W32A	APP CRS 318°	Rwy Ldg TDZE Apt Elev 6121 713 727
--	------------------------	--

RNAV (GPS) RWY 32
BUFFALO NIAGARA INTL (BUF')

RNP APCH - GPS	MALSR	MISSED APPROACH: Climb to 3000 direct YULCU on track 235° to SUSKE and hold.
▼ For uncompensated Baro-VNAV systems LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility all Cats to 1 SM. Inop table does not apply to LPV all Cats.		

D-ATIS 135.35	BUFFALO APP CON 126.15 263.125	BUFFALO TOWER 120.5 257.8	GND CON 133.2 257.8
-------------------------	--	-------------------------------------	-------------------------------

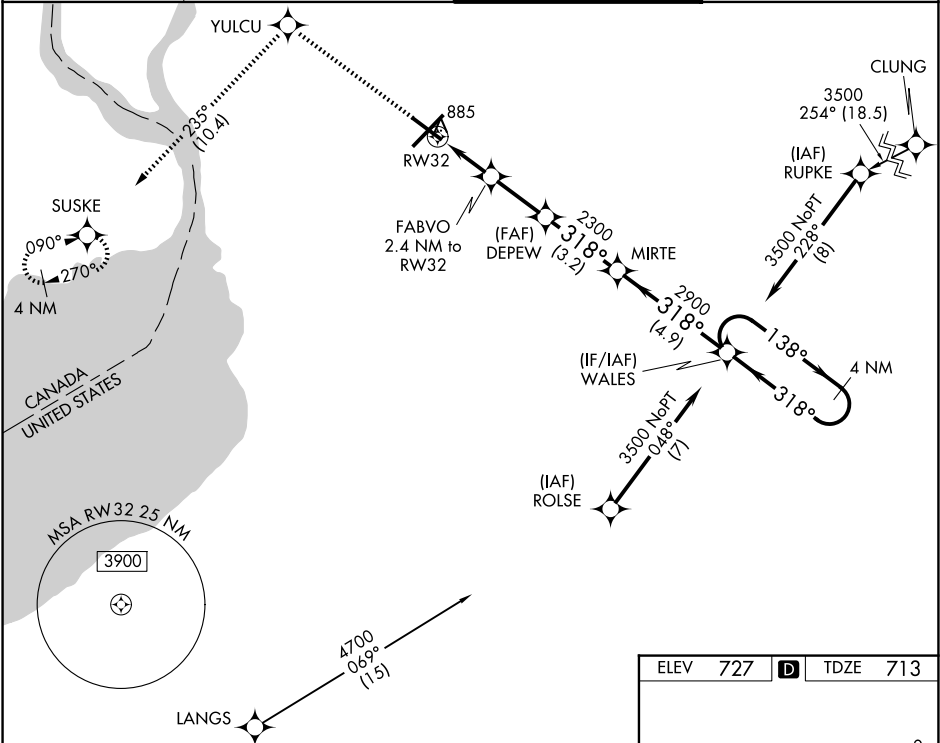

3000	YULCU	tr 235°	SUSKE	
* LNAV only.				
FABVO 2.4 NM to RW32				
DEPEW 2300				
MIRTE 2900				
WALES 318°				
4 NM Holding Pattern				
GP 3.00° TCH 54				
1.2 NM 1.2 NM 2.4 NM 3.2 NM 4.9 NM				
CATEGORY	A	B	C	D
LPV DA	913-½ 200 (200-½)			
LNAV/ VNAV DA	1092-⅝ 379 (400-⅝)			
LNAV MDA	1140-½ 427 (500-½)		1140-¾ 427 (500-¾)	
CIRCLING	1200-1 473 (500-1)		1220-1½ 493 (500-1½) 1340-2 613 (700-2)	

