


APP CRS	Rwy Ldg	7569
235°	TDZE	726
	Apt Elev	727


RNAV (RNP) Z RWY 23

BUFFALO NIAGARA INTL (BUF')

RNP AR APCH.	ALSF-2	MISSED APPROACH: Climb to 3000 on the RNAV missed approach route to WABUS and hold.
▼ For uncompensated Baro-VNAV systems, procedure NA below -18°C or above 54°C. For inop ALSF, increase RNP 0.10 all Cats visibility to 1 ¼. For inop ALSF, increase RNP 0.20 all Cats visibility to 1 ½. For inop ALSF, increase RNP 0.30 all Cats visibility to 1 ¾.	⦿	

D-ATIS 135.35	BUFFALO APP CON 126.15 263.125	BUFFALO TOWER 120.5 257.8	GND CON 133.2 257.8
------------------	-----------------------------------	------------------------------	------------------------

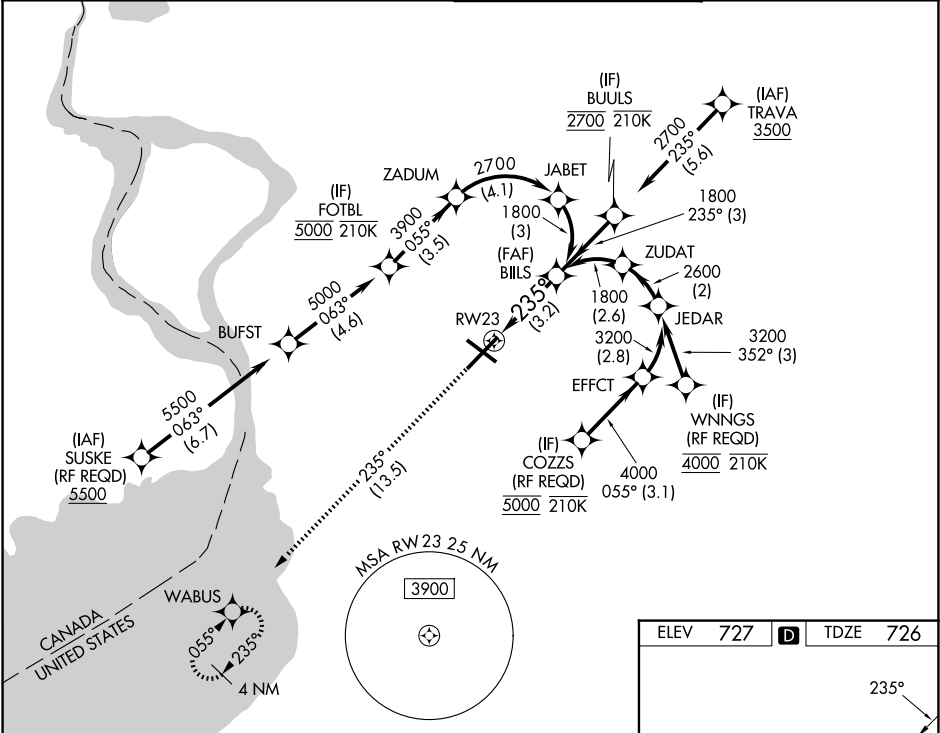

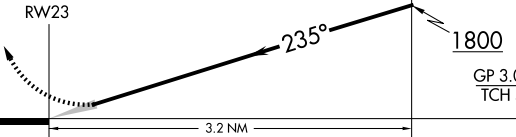3000 ↑ tr 235	WABUS	See planview for multiple IF locations.			
					
CATEGORY	A	B	C	D	
RNP 0.10 DA	1114/45		388 (400-7%)		
RNP 0.20 DA	1170/55		444 (500-1)		
RNP 0.30 DA	1228-1¼		502 (600-1¼)		
AUTHORIZATION REQUIRED					

