

CHARLOTTE/DOUGLAS INTL (CLT)
CHARLOTTE, NORTH CAROLINA

BEAVY NINE DEPARTURE (RNAV)

RNAV 1 - DME/DME/IRU or GPS.
RADAR required.


TOP ALTITUDE:
8000

NOTE: Turbojet only.

NOTE: If unable to accept climb rates, advise ATC on initial contact.


NOTE: Transponder code will be issued via PDC or Charlotte CLNC DEL.

NOTE: Accelerate to 250K, if unable advise ATC. Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.

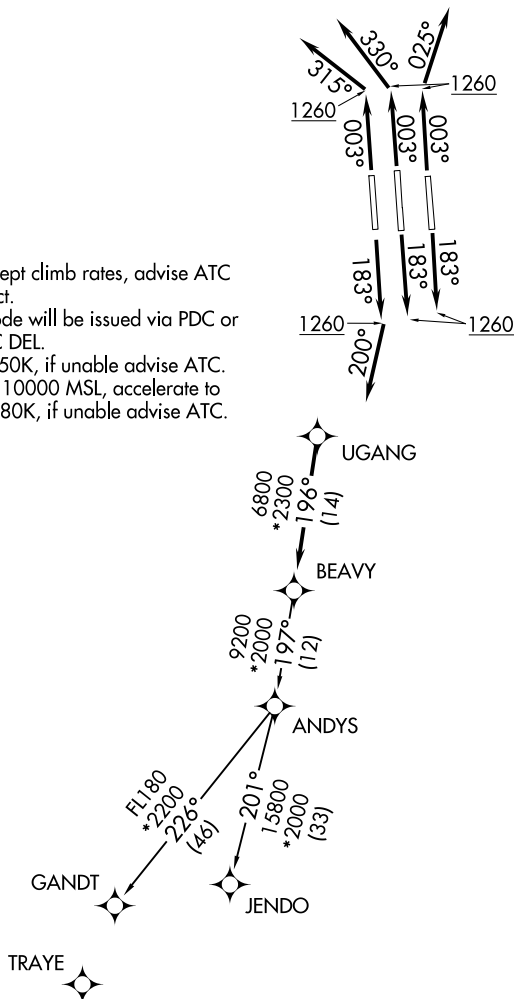

TAKEOFF MINIMUMS

Rwys 1R, 18, 19L/R, 36: Standard with minimum climb of 500'/NM to 1260.
Rwy 1L: Standard with minimum climb of 500'/NM to 1400.



NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

BEAVY NINE DEPARTURE (RNAV)

(BEAVY9.BEAVY) 03SEP26

CHARLOTTE, NORTH CAROLINA
CHARLOTTE/DOUGLAS INTL (CLT)

SE-2, 03 SEP 2026 to 01 OCT 2026