

TOP ALTITUDE:
8000

RNAV 1 - DME/DME/IRU or GPS.



RADAR required.

CHARLOTTE DEP CON
120.5 257.2
D-ATIS DEP
132.1
CLNC DEL
127.15 348.6
CPDLC
GND CON
121.8 348.6 (W)
121.9 348.6 (E)
CHARLOTTE TOWER
1118.1 257.8 (18-36)
126.4 257.8 (1R-19L)
133.35 257.8 (1L-19R)

TAKEOFF MINIMUMS

Rwys 1R, 18, 19L/R, 36: Standard with minimum climb of 500'/NM to 1260.

Rwy 1 L: Standard with minimum climb of 500' / NM to 1400.

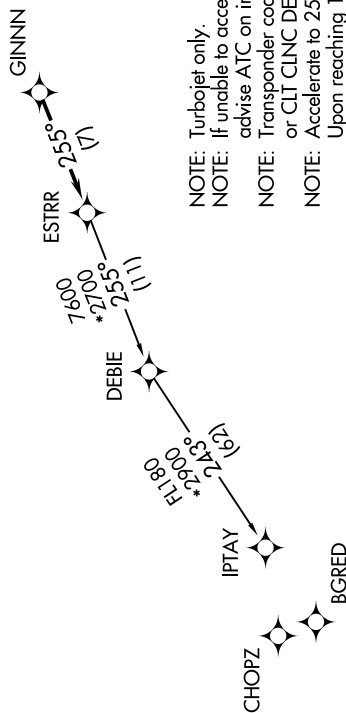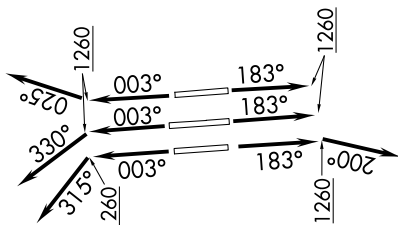

NOTE: Turbojet only.

NOTE: If unable to accept climb rates,

advise ATC on initial contact.


NOTE: Transponder code

or $\text{CLT}^{\dagger} \text{CLNC DEL.}$

NOTE: Accelerate to 250K, if unable advise ATC.

Upon reaching 10000 MSL, accelerate to

and maintain 280K, if unable advise ATC.



NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

SE-2, 03 SEP 2026 to 01 OCT 2026

(ESTRR8.ESTRR) 03SEP26

CHARLOTTE, NORTH CAROLINA
CHARLOTTE/DOUGLAS INTL (CLT)