

WAAS CH 70307 W27A	APP CRS 265°	Rwy Ldg TDZE 6121 Apt Elev 6160
--	------------------------	---

RNAV (GPS) RWY 27

CHEYENNE RGNL/JERRY OLSON FLD (CYS)


RNP APCH:

 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 45°C. For inop ALS, increase LNAV/VNAV all Cts visibility to RVR 4000.
ASR/PAR # RVR 1800 authorized with use of FD or AP or HUD to DA.




MISSED APPROACH: Climb to 6600, then climbing right turn to 10400 direct SENSE and hold, continue climb-in-hold to 10400.

ATIS 134.425 278.3	CHEYENNE APP CON★ 124.55 263.075	CHEYENNE TOWER★ 118.7(CTAF) 0 257.8	GND CON 121.9 254.275	UNICOM 122.95
------------------------------	--	---	---------------------------------	-------------------------

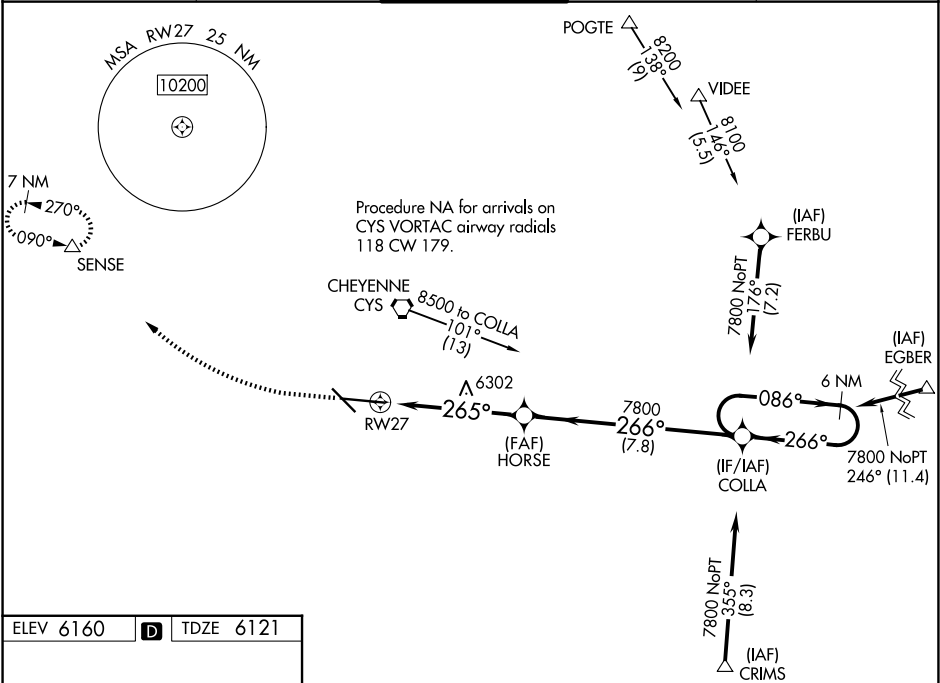

ELEV 6160	D	TDZE 6121
-----------	----------	-----------



	6600	10400	SENSE	
				
	* LNAV only			
	* 1.3 NM to RWY 27			
	RWY 27			
	HORSE			
	COLLA			
	6 NM Holding Pattern			
	GP 3.00° TCH 55			
CATEGORY	A	B	C	D
LPV DA#	6321/24 200 (200-½)			
LNAV/VNAV DA	6376/24 255 (300-½)			
LNAV MDA	6560/24 439 (400-½)		6560/40 439 (400-¾)	
CIRCLING	6640-1 480 (500-1)		6900-2 740 (800-2) 6920-2½ 760 (800-2½)	

CHEYENNE, WYOMING
Amdt 1A 28FEB19

CHEYENNE RGNL/JERRY OLSON FLD (CYS)
41°09'N-104°49'W
RNAV (GPS) RWY 27

NW-1, 03 SEP 2026 to 01 OCT 2026

NW-1, 03 SEP 2026 to 01 OCT 2026