


TAKEOFF MINIMUMS
Rwy 6L/R, 24L/R, 28: Standard with minimum climb of 500' per NM to 1300.
Rwy 10: Standard with minimum climb of 500' per NM to 1600.

RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

TOP ALTITUDE:
14000

CLEVELAND DEP CON
128.25 346.325
D-ATIS
132.375
CLINC DEL
125.05 273.45
CPDLC
GND CON
121.7 273.45
CLEVELAND TOWER
124.5 273.45

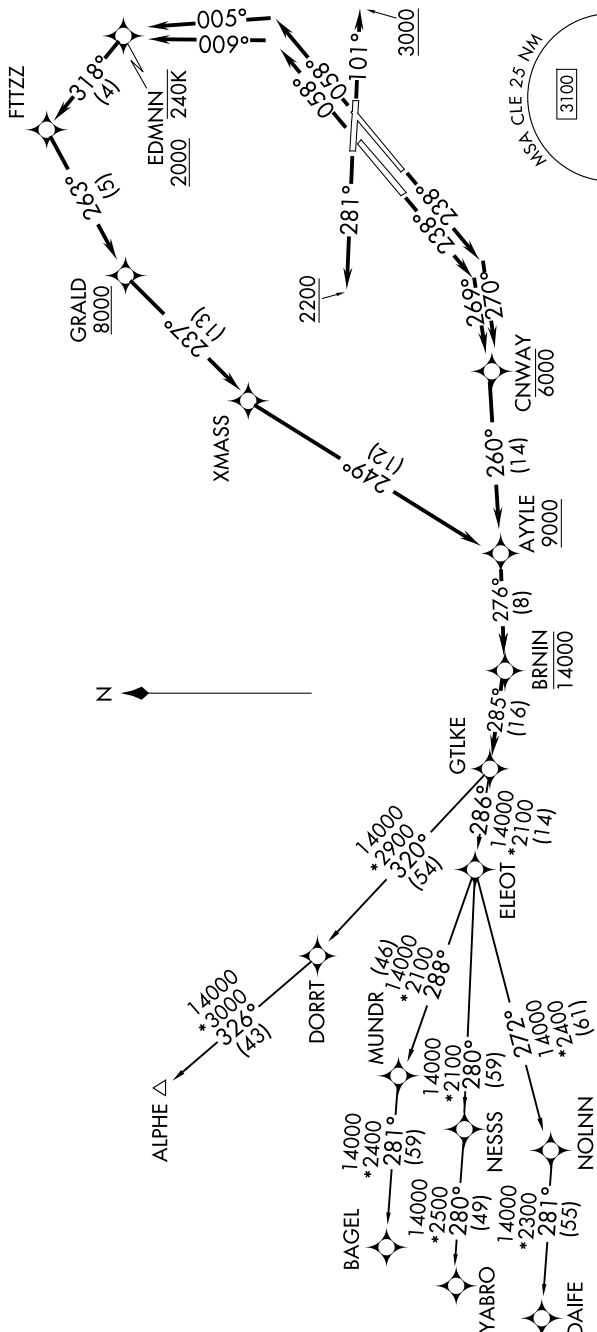

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

EC-2, 03 SEP 2026 to 01 OCT 2026

CLEVELAND-HOPKINS INTL (CLE)