

LOVE STAR DEP CON
118.55 290.35
D-ATIS
120.15
CLNC DEL
127.9
CPDLC
GND CON
121.75 348.6
LOVE TOWER
123.7 239.3

TOP ALTITUDE:
RWYS 13L/R: 8000
RWYS 31L/R: 3000


- NOTE: RADAR required.
- NOTE: DME/DME/IRU or GPS required.
- NOTE: RNAV 1.
- NOTE: For use by turbojet aircraft only.
- NOTE: MRSSH Transition for aircraft inbound to Shreveport, Jackson, and Monroe terminal area airports only.
- NOTE: RNAV-capable props: File and expect the KUSSO RNAV SID.
- NOTE: Use the DALLAS DEPARTURE during the period 2100-0600 local time in lieu of the LNDRE DEPARTURE.
- NOTE: BDDAY Transition ATC assigned only.

LNDRE FIVE DEPARTURE (RNAV)
(LNDRE5.LNDRE) 05DEC19

AL-106 (FAA)

DALLAS LOVE FLD (DAL)

DALLAS, TEXAS

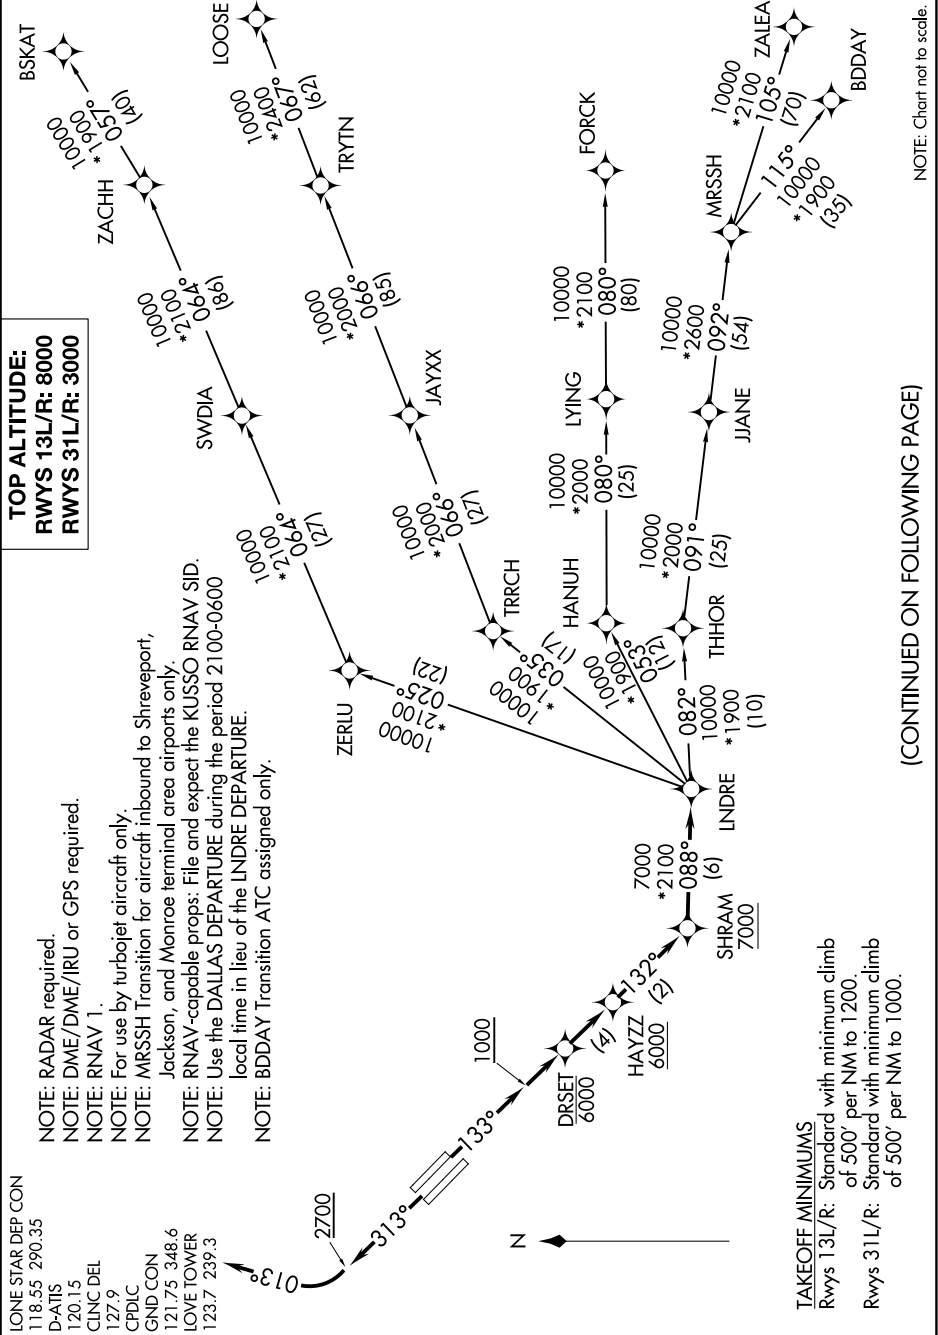

(CONTINUED ON FOLLOWING PAGE)

TAKEOFF MINIMUMS
Rwys 13L/R: Standard with minimum climb of 500' per NM to 1200.
Rwys 31L/R: Standard with minimum climb of 500' per NM to 1000.

DALLAS, TEXAS
DALLAS LOVE FLD (DAL)