

WAAS CH 42947 W13A	APP CRS 130°	Rwy Ldg TDZE Apt Elev	3038 1159 1167
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13



ENID WOODRING RGNL(WDG)

RNP APCH - GPS.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using GOK altimeter setting. When local altimeter setting not recieved, use GOK altimeter setting and increase LPV DA to 1507 feet and all visibilities ¼SM. Increase LNAV/VNAV DA to 1523 feet and all visibilities ½SM. Increase all MDAs 100 feet and LNAV visibility Cat C ¼SM, and Circling visibility Cat C ½SM.

▲ MISSED APPROACH: Climb to 3000 direct RDGRS and hold.

AWOS-3PT 123.725	VANCE APP CON★ 121.3 346.325	WOODRING TOWER★ 118.9 (CTAF) 0 257.95	GND CON 121.925
----------------------------	--	---	---------------------------

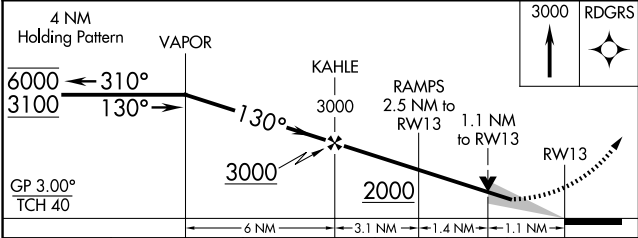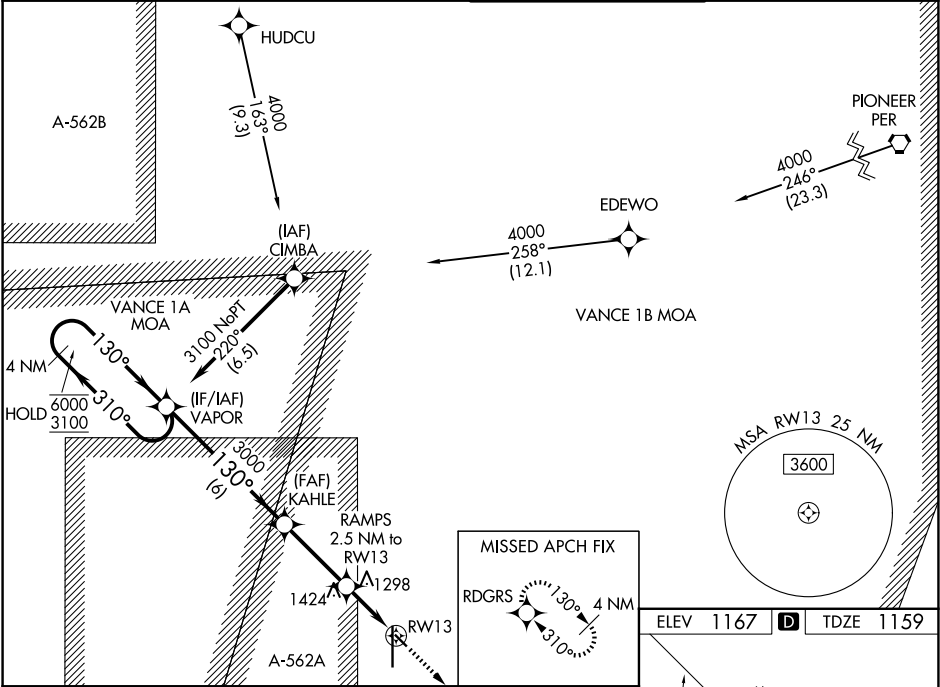

CATEGORY	A	B	C	D
LPV DA	1409-¾	250 (300-¾)		NA
LNAV/VNAV DA	1425-7/8	266 (300-7/8)		NA
LNAV MDA	1560-1	401 (400-1)	1560-1 1/8 401 (400-1 1/8)	NA
CIRCLING	1760-1	593 (600-1)	1820-1 3/4 653 (700-1 3/4)	NA

