


WAAS CH 86812 W24A	APP CRS 245°	Rwy Ldg TDZE 730 Apt Elev 732
--	------------------------	---

RNAV (GPS) RWY 24
ERIE INTL/TOM RIDGE FLD (ERI)

RNP APCH - GPS.		MALSR 	MISSED APPROACH: Climb to 3000 direct LADVE and hold.
  Circling to Rwy 2 and 20 NA at night. Circling NA southeast of Rwy 6-24. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS increase LNAV/VNAV all Cats visibility to RVR 6000.			

ATIS 120.35	BUFFALO APP CON ★ 121.0 257.8	ERIE TOWER ★ 118.1 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

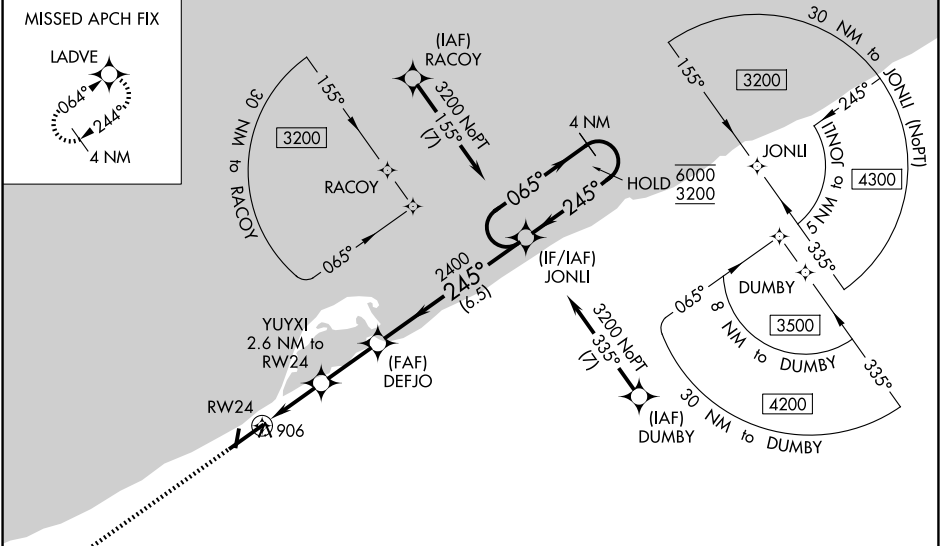

ELEV 732		D		TDZE 730	
3000 LADVE					
CATEGORY	A	B	C	D	
LPV DA	942/24		212 (300-½)		
LNAV/VNAV DA	1146/40		416 (500-¾)		
LNAV MDA	1160/24	430 (500-½)	1160/40	430 (500-¾)	
CIRCLING	1160-1 428 (500-1)	1200-1 468 (500-1)	1200-1½ 468 (500-1½)	1340-2 608 (700-2)	
ERIE, PENNSYLVANIA Amdt 2A 14JUL22		ERIE INTL/TOM RIDGE FLD (ERI) RNAV (GPS) RWY 24			