

WAAS CH 69629 W32A	APP CRS 317°	Rwy Ldg TDZE Apt Elev 6236 2605 2613
--	------------------------	--

RNAV (GPS) RWY 32


PECOS MUNI (PEQ)

RNP APCH - GPS.

▼ Baro-VNAV and VDP NA when using Wink altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Wink altimeter setting: increase LPV DA to 2900 feet, LNAV/VNAV DA to 2950 feet and all visibilities ¼ SM; increase all MDA 100 feet and visibility Cat C and LNAV Cat D ¼ SM. Circling Rwy 9, 27 NA at night.

MISSED APPROACH:
Climb to 4600 direct WALOM and hold.

AWOS-3 118.175	ALBUQUERQUE CENTER 135.875 292.15	UNICOM 122.8 (CTAF) ①
--------------------------	---	---------------------------------

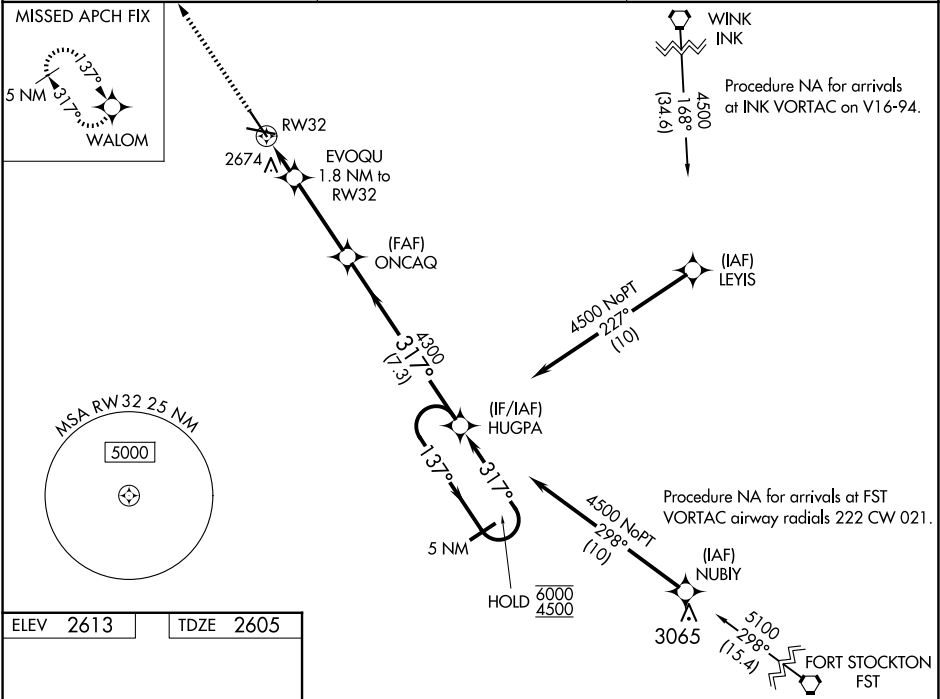

4600 WALOM		EVOQU 1.8 NM to RW32		ONCAQ 4300	HUGPA 5 NM Holding Pattern
↑		0.9 NM to RW32		3200	317° 6000 4500
RW32		3.4 NM		4300	GP 3.00° TCH 40
CATEGORY	A	B	C	D	
LPV DA	2805-¾		200 (200-¾)		
LNAV/VNAV DA	2855-¾		250 (300-¾)		
LNAV MDA	2940-1		335 (400-1)		
CIRCLING	3060-1 447 (500-1)	3140-1 527 (600-1)	3360-2¼ 747 (800-2¼)	3360-2½ 747 (800-2½)	