


ATIS
135.575 269.9
GND CON
121.6 275.8
ELLINGTON TOWER
126.05 253.5
HOUSTON DEP CON
134.45 284.0

TOP ALTITUDE:
ASSIGNED BY ATC

TAKEOFF MINIMUMS

Rwys 4, 17L/R, 22, 35L/R:
Standard with minimum climb of 500' per NM to 540.

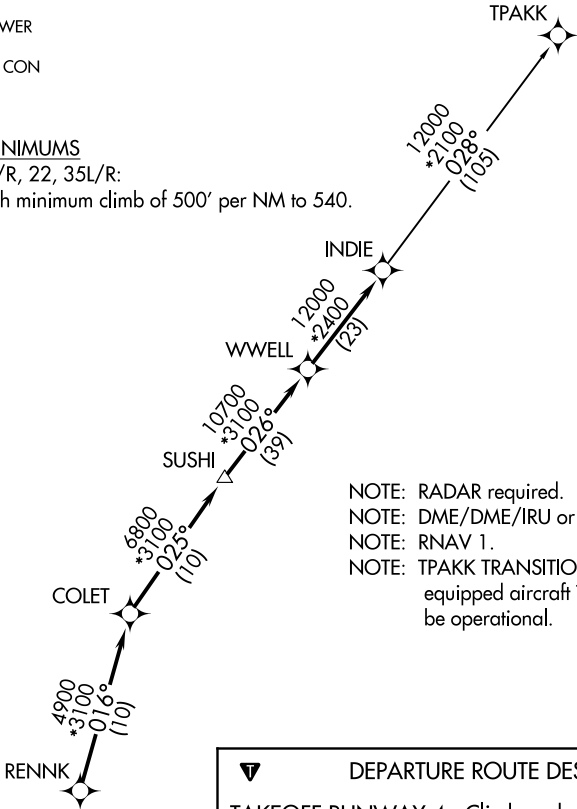

NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.
NOTE: TPAKK TRANSITION: For non GPS
equipped aircraft TNV DME must
be operational.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 4: Climb on heading 039° to 540 for
RADAR vectors to RENNK, thence
TAKEOFF RUNWAYS 17L/R: Climb on heading 174° to
540 for RADAR vectors to RENNK, thence
TAKEOFF RUNWAY 22: Climb on heading 219° to 540
for RADAR vectors to RENNK, thence
TAKEOFF RUNWAYS 35L/R: Climb on heading 354° to
540 for RADAR vectors to RENNK, thence

. . . . on track 016° to COLET, then on track 025° to SUSHI,
then on track 026° to WWELL, then on track 026° to INDIE,
then on (transition). Maintain ATC assigned altitude.
Expect filed altitude 10 minutes after departure.

TPAKK TRANSITION (INDIE8.TPAKK)

NOTE: Chart not to scale.