

WAAS
CH **70709**
W35D

APP CRS
350°

Rwy Ldg
TDZE
Apt Elev

7800
479
501

RNAV (GPS) Y RWY 35R

LOUISVILLE MUHAMMAD ALI INTL (SDF)


RNP APCH - GPS.

▼ Simultaneous approach authorized. LNAV procedure NA during simultaneous operations.
▲ Use of FD or AP required during simultaneous operations. Circling Rwy 11 NA at night.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C.

ALSF-2


MISSED APPROACH:
Climb to 1600 then climbing
right turn to 4000 direct
TORAC and hold.

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6
--------------------------	--	--	-------------------------------

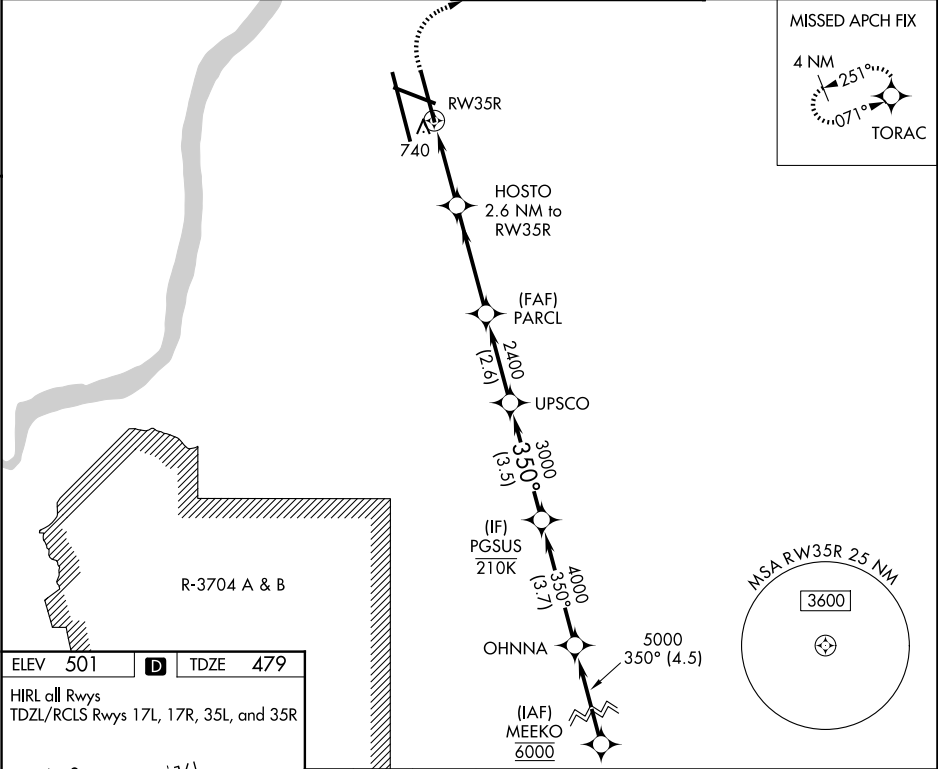

ELEV **501** **D** TDZE **479**

HIRL all Rwys
TDZL/RCLS Rwys 17L, 17R, 35L, and 35R

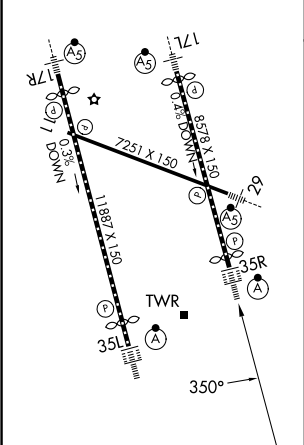

1600	4000	TORAC	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).			
1.4 NM to RW35R		1.4	1.2 NM	3.3 NM	2.6 NM	3.5 NM
1360		2400	3000	4000	GP 3.00° TCH 60	
CATEGORY	A	B	C	D		
LPV DA	679/18		200 (200-½)			
LNAV/VNAV DA	901/40		422 (400-¾)			
LNAV MDA	1000/24	521 (500-½)	1000/55	521 (500-1)		
CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1160-1¾ 659 (700-1¾)	1400-3 899 (900-3)		