RNAV (GPS) RWY 28

MONTGOMERY RGNL (DANNELLY FLD) (MGM)

WAAS CH 56200 W28A	APP CRS 277°	Rwy Ldg 9020 / TDZE 197 / Apt Elev 232

RNP APCH-GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. For inop MALSR, increase LPV Cat E visibility to ¾ mile; increase LNAV/VNAV Cat E visibility to 1⅜ mile; increase LNAV Cat E visibility to 1⅛ mile. Circling for Cat E NA north of Rwy 10-28.

MALSR

MISSED APPROACH: Climb to 3100 direct HEGAP and hold.

ATIS	MONTGOMERY APP CON★	DANNELLY TOWER★	GND CON	UNICOM
120.675	124.0 363.025	119.7 (CTAF) L 360.85	121.7 348.6	122.95

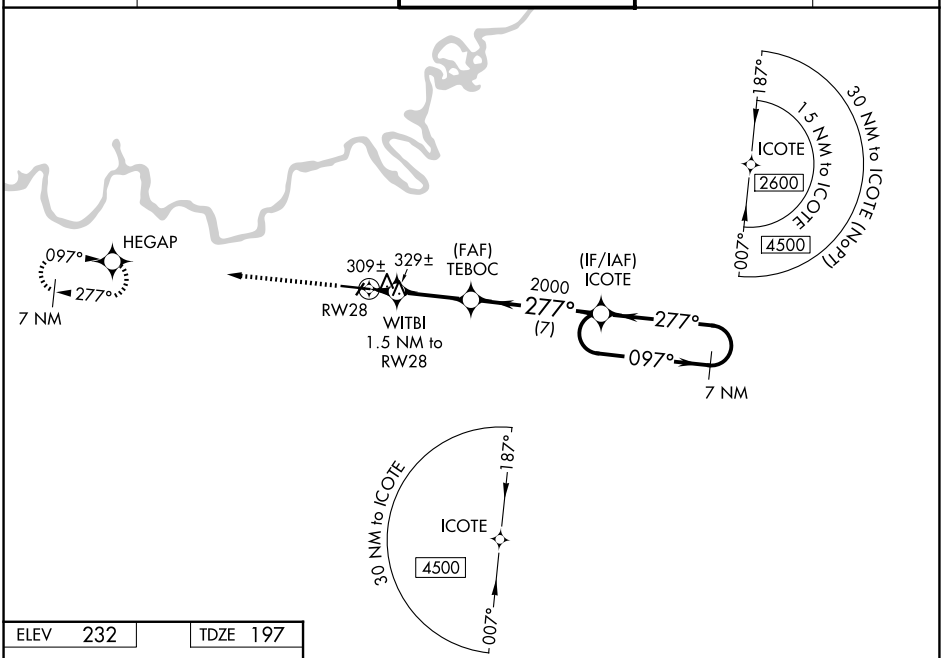

ELEV 232 TDZE 197



REIL Rwy 3 L
MIRL Rwy 3-21
HIRL Rwy 10-28

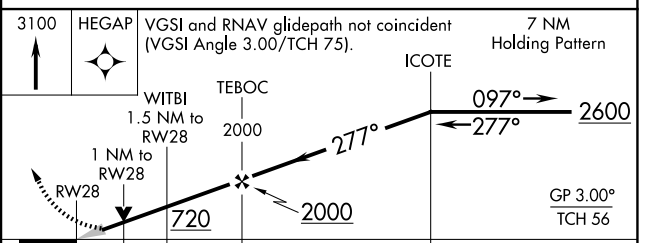

CATEGORY	A	B	C	D	E
LPV DA	397-½ 200 (200-½)				
LNAV/VNAV DA	606-⅞ 409 (400-⅞)				
LNAV MDA	580-½ 383 (400-½)		580-⅝ 383 (400-⅝)		
CIRCLING	700-1 468 (500-1)		800-1½ 568 (600-1½)	860-2 628 (700-2)	860-2¼ 628 (700-2¼)

SE-4, 03 SEP 2026 to 01 OCT 2026
SE-4, 03 SEP 2026 to 01 OCT 2026