

LOC I-MSL	APP CRS	Rwy Ldg	6694
109.7	297°	TDZE	551
		Apt Elev	551

ILS Z or LOC Z RWY 30
NORTHWEST ALABAMA RGNL (MSL)

DME required. RADAR required.

▼



▲

DME from MSL DME.
Simultaneous reception of I-MSL and MSL DME required.
For inop ALS increase S-LOC 30 Cats C/D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 on heading 020° to intercept RQZ VORTAC R-268 to JOBUM/RQZ VORTAC 42.5 DME/RADAR and hold, continue climb-in-hold to 3000.

ASOS	MEMPHIS CENTER	GCO	UNICOM
119.425	120.8 307.0	121.725	123.05 (CTAF) 0

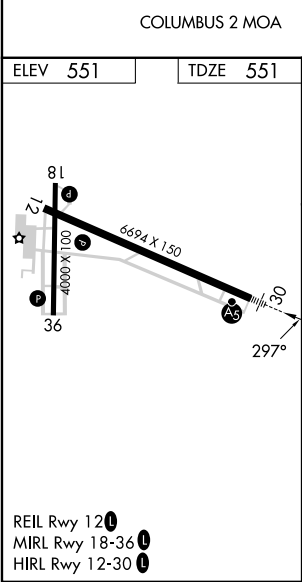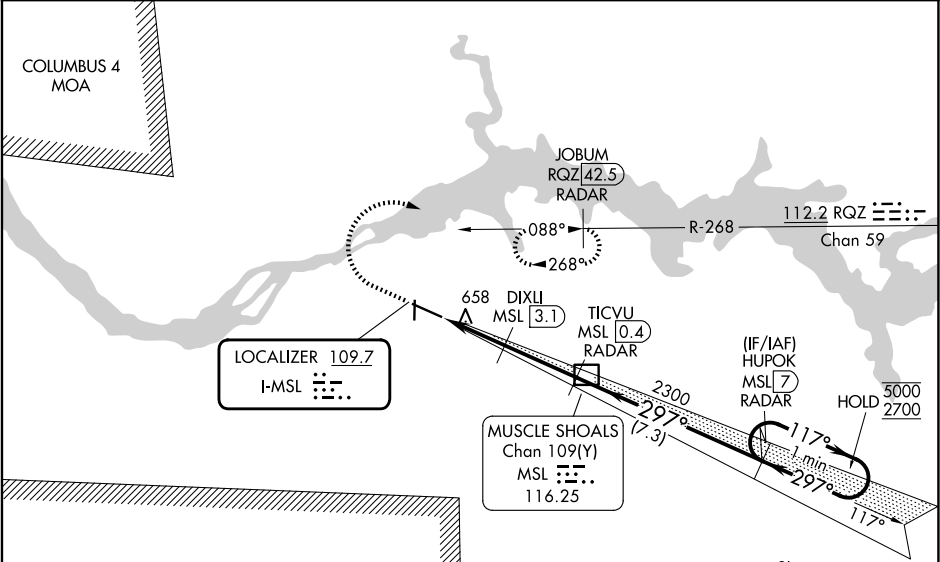

1200	3000	RQZ R-268	JOBUM RQZ 42.5 RADAR	MSL DME	HUPOK MSL 7 RADAR	One Minute Holding Pattern
1200	3000	hdg 020°	DIXLI MSL 3.1	TICVU MSL 0.4 RADAR	2300	117° → 5000 ← 297° 2700
1200	3000	hdg 020°	MSL 4.6	MSL 5.6	1400	2300
1200	3000	hdg 020°	1 NM	1.5 NM	2.8 NM	7.3 NM
CATEGORY	A	B	C	D		
S-ILS 30	751-1/2	200 (200-1/2)				
S-LOC 30	920-1/2	369 (400-1/2)	920-5/8	369 (400-5/8)		
CIRCLING	1040-1	489 (500-1)	1280-2	729 (800-2)	1280-2 1/4	729 (800-2 1/4)

SE-4, 03 SEP 2026 to 01 OCT 2026

SE-4, 03 SEP 2026 to 01 OCT 2026