RNAV (GPS) RWY 36

MYRTLE BEACH INTL (MYR)

WAAS	APP CRS	Rwy Ldg	9503
CH 93719	357°	TDZE	25
W36A		Apt Elev	25

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Inop table does not apply to LPV. For inop ALS, increase LNAV Cats C, D, and E visibility to 1⅜ SM.

MALSF

MISSED APPROACH: Climb to 2000 direct PEDEE and hold.

ATIS	MYRTLE BEACH APP CON ★	MYRTLE BEACH TOWER ★	GND CON	CLNC DEL	UNICOM
123.925	(171° - 321°) 127.4 257.95 (322° - 170°) 119.2 350.3	128.45 (CTAF) L 259.3	120.3 275.8	120.3	122.95

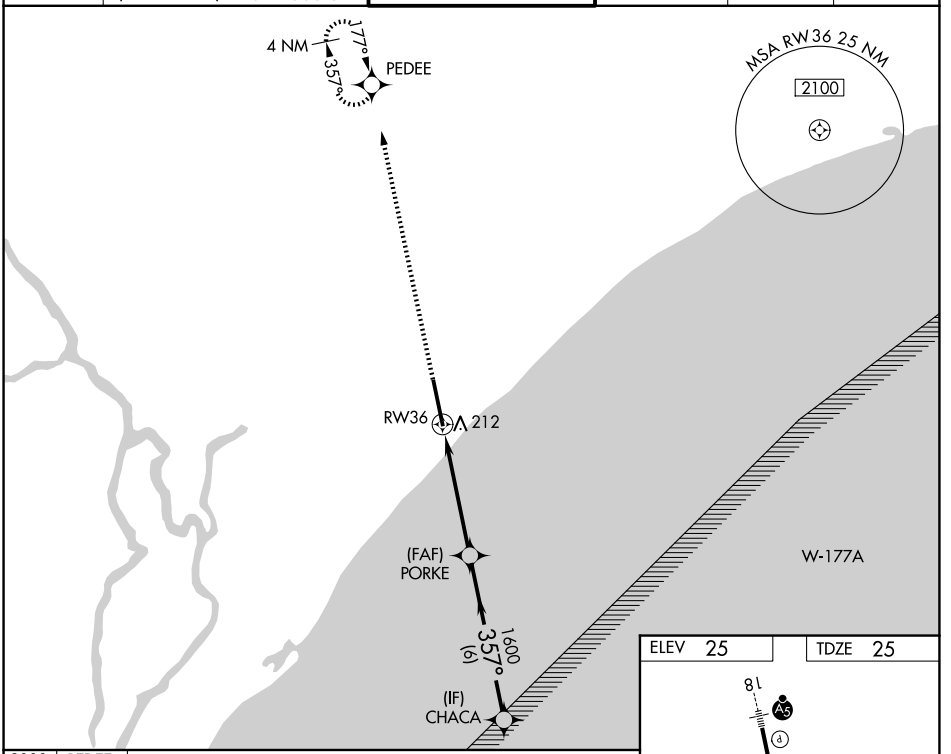

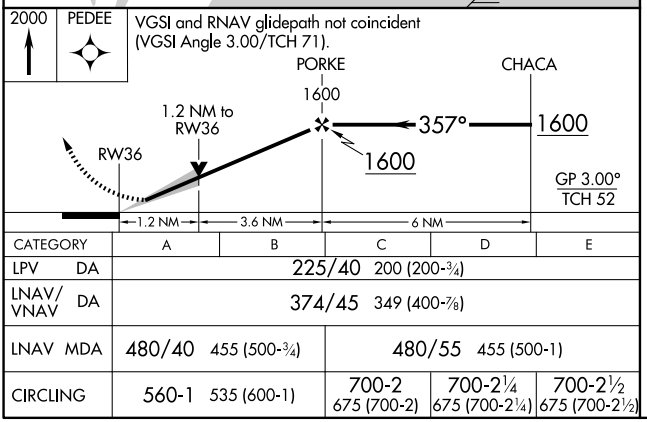

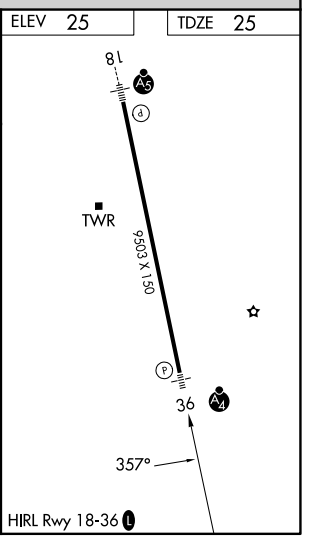

CATEGORY	A	B	C	D	E
LPV DA	225/40 200 (200-¾)				
LNAV/VNAV DA	374/45 349 (400-⅞)				
LNAV MDA	480/40 455 (500-¾)		480/55 455 (500-1)		
CIRCLING	560-1 535 (600-1)		700-2 675 (700-2)	700-2¼ 675 (700-2¼)	700-2½ 675 (700-2½)

SE-2, 03 SEP 2026 to 01 OCT 2026
SE-2, 03 SEP 2026 to 01 OCT 2026