

WAAS CH 40313 W01B	APP CRS 006°	Rwy Ldg TDZE 17 Apt Elev 36
--	------------------------	---

RNAV (GPS) Z RWY 1L

NAPA COUNTY (APC)

RNP APCH - GPS.


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. Inop table does not apply to LPV minimums. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM.

MALS

MISSED APPROACH: Climb to 5000 direct CIVDA and on track 326° to POPES and hold. Missed approach requires minimum climb of 420 feet per NM to 2200; if unable to meet climb gradient, see RNAV (GPS) Y RWY 1L.

ATIS 124.05	OAKLAND CENTER 127.8 353.5	NAPA TOWER★ 118.70 (CTAF) 257.8	GND CON 121.7	UNICOM 122.95
-----------------------	--------------------------------------	---	-------------------------	-------------------------

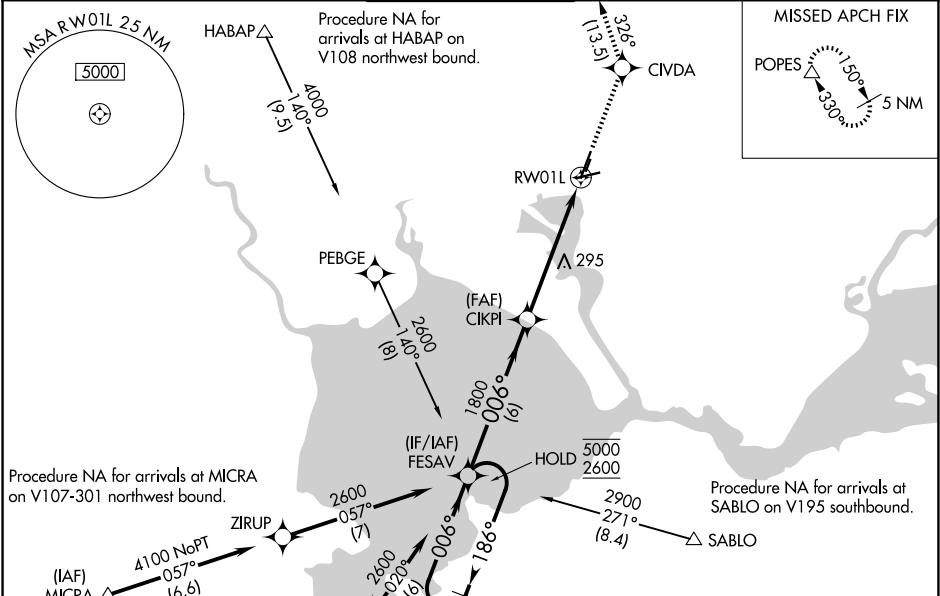

ELEV 36 TDZE 17

REIL Rwy 6

MIRL Rwys 6-24 and 1L-19R

4 NM Holding Pattern

FESAV

5000 186° 2600 006°

GP 3.00° TCH 50

6 NM 3.9 NM 1.6 NM

CIKPI 1800

1.6 NM to RW01L

RW01L

5000 CIVDA tr 326° POPES

CATEGORY	A	B	C	D
LPV DA		217-¾ 200 (200-¾)		
LNAV/VNAV DA		330-¾ 313 (300-¾)		
LNAV MDA	560-¾ 543 (600-¾)		560-1⅜ 543 (600-1⅜)	

SW-2, 03 SEP 2026 to 01 OCT 2026

SW-2, 03 SEP 2026 to 01 OCT 2026