


APP CRS	Rwy Ldg	6501
288°	TDZE	10
	Apt Elev	18

RNAV (RNP) Y RWY 29


NEWARK LIBERTY INTL (EWR)

RNP AR APCH. RF required.	MISSED APPROACH: Climb to 2000 on track 288° to MUFIE and hold. *Missed approach requires minimum climb of 417 feet per NM to 800.
For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C. Caution, departing TEB Rwy 24 traffic climbing to 1500' MSL. Straight-In Rwy 29 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.	

D-ATIS 115.7 134.825	NEWARK APP CON 128.55 379.9	NEWARK TOWER 118.3 257.6	GND CON 121.8
-------------------------	--------------------------------	-----------------------------	------------------

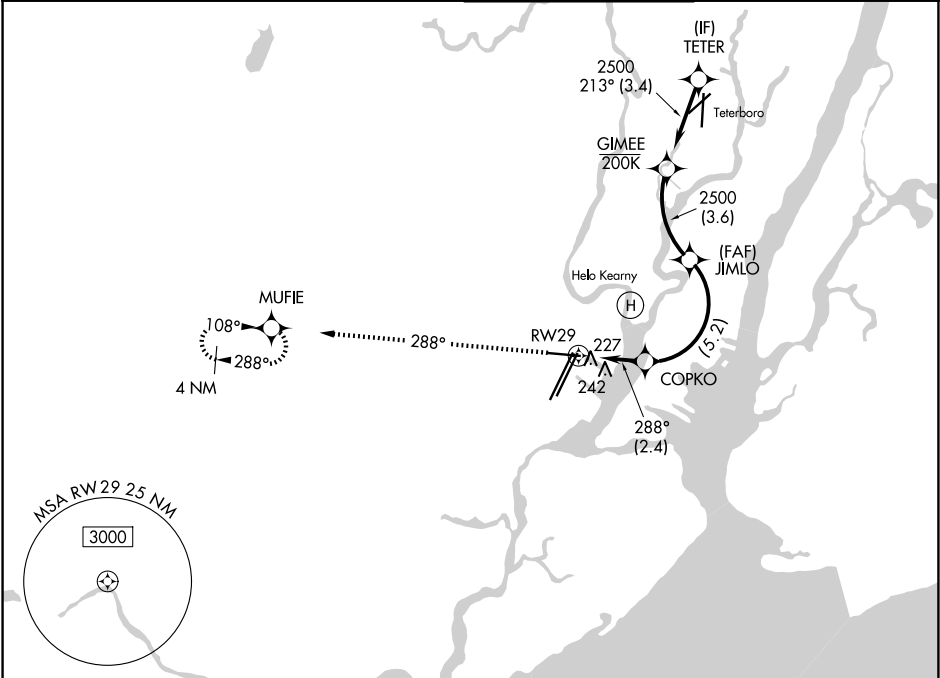

ELEV 18	D	TDZE 10
---------	---	---------

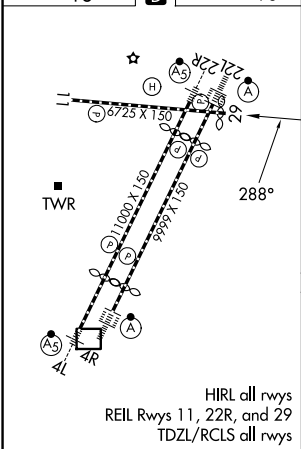

2000	tr 288°	MUFIE				
RWY 29		COPKO	JIMLO	GIMEE	TETER	
2.4 NM		5.2 NM	3.6 NM	3.4 NM		
CATEGORY		A	B	C	D	
RNP 0.16 DA			461-1 $\frac{3}{8}$	451 (500-1 $\frac{3}{8}$)		
RNP 0.30 DA*			583-1 $\frac{3}{8}$	573 (600-1 $\frac{3}{8}$)		
RNP 0.30 DA			625-1 $\frac{3}{4}$	615 (700-1 $\frac{3}{4}$)		

AUTHORIZATION REQUIRED