


APP CRS	Rwy Ldg	6501
288°	TDZE	10
	Apt Elev	18

RNAV (GPS) W RWY 29

NEWARK LIBERTY INTL (EWR)

RNP APCH - GPS.	MISSED APPROACH: (Do not exceed 165K until Rwy 29) Climb to 2000 on the extended visual approach track to Rwy 29, then climb to 3000 direct MUFIE and hold.
RADAR required.	
▼ ▲ Rwy 29 helicopter visibility reduction below 1 SM NA. Straight-in Rwy 29 at night, operational VGSIL required, remain at or above VGSIL glidepath until threshold. Caution, departing TEB Rwy 24 traffic climbing to 1500' MSL.	

D-ATIS	NEWARK APP CON	NEWARK TOWER	GND CON
115.7 134.825	128.55 379.9	118.3 257.6	121.8

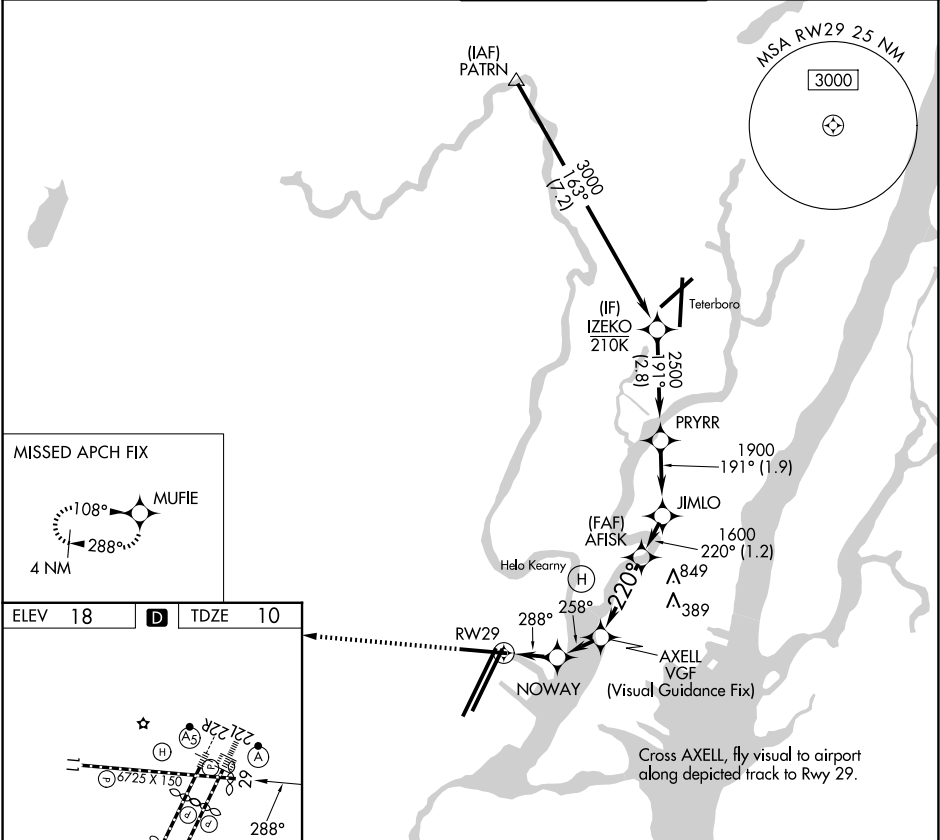

ELEV 18	D	TDZE 10	Turns required in the visual segment. * Recommended ALT.			
			2000	to RW29	3000	MUFIE
			AXELL 1600, JIMLO 1900, PRYRR 2500, IZEKO 3000			
HIRL all rwys REIL Rws 11, 22R, and 29 TDZL/RCLS all rwys			CATEGORY A B C D			
			LNAV MDA 880-3 870 (900-3)			

NE-2, 03 SEP 2026 to 01 OCT 2026

NE-2, 03 SEP 2026 to 01 OCT 2026