ILS or LOC RWY 25

ORLANDO EXEC (ORL)

LOC/DME I-EXO	APP CRS	Rwy Ldg	6004
109.35	253°	TDZE	113
Chan 30(Y)		Apt Elev	113

DME or RADAR required.

Circling Rwy 31 NA at night. In minimum visibility conditions, bright lights on highway ½ mile south of airport may be mistaken for runway lights.

MISSED APPROACH: Climb to 600 then climbing right turn to 1700 on heading 315° and on ORL VORTAC R-303 to FTEEN/ORL 13.8 DME and hold.

ATIS	ORLANDO APP CON	EXECUTIVE TOWER ★	GND CON	UNICOM
127.25	119.4 351.9 (7) 125.225 351.9 (25)	118.7 (CTAF) L 239.0	121.4 239.0	122.95

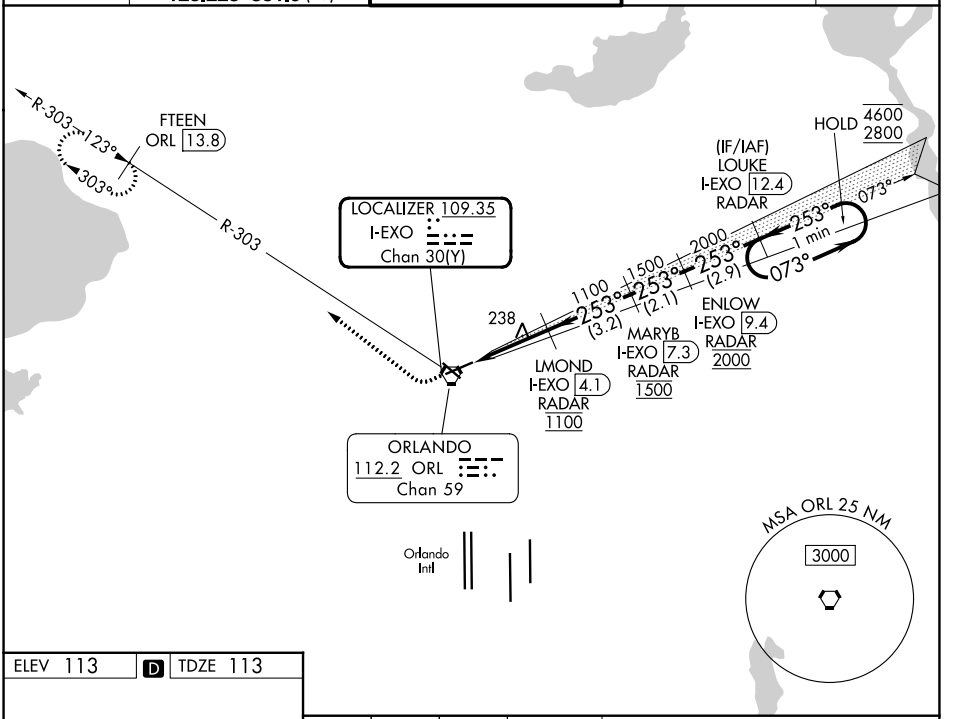

SE-3, 03 SEP 2026 to 01 OCT 2026

SE-3, 03 SEP 2026 to 01 OCT 2026

ELEV 113 D TDZE 113



REIL Rwys 25, 13 and 31 L
HIRL Rwys 7-25 and 13-31 L

FAF to MAP 3 NM

Knots	60	90	120	150	180
Min:Sec	3:00	2:00	1:30	1:12	1:00

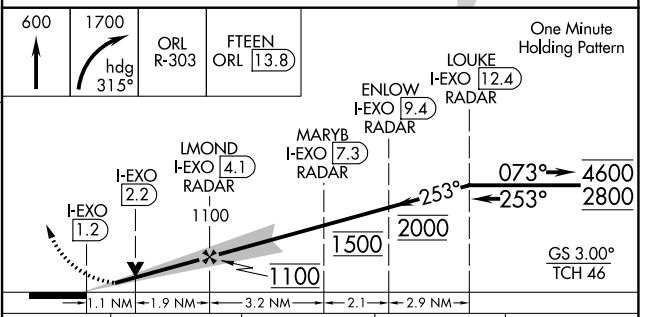

CATEGORY	A	B	C	D
S-ILS 25	313-¾ 200 (200-¾)			
S-LOC 25	500-1 387 (400-1)		500-1⅛ 387 (400-1⅛)	
CIRCLING	580-1 467 (500-1)	680-1 567 (600-1)	860-2¼ 747 (800-2¼)	860-2½ 747 (800-2½)