

WAAS CH 70729 W07A	APP CRS 073°	Rwy Ldg TDZE 109 Apt Elev 113
--	------------------------	---

RNAV (GPS) RWY 7

ORLANDO EXEC (ORL)

RNP APCH-GPS.

⚠

Circling Rwy 31 NA at night. Rwy 7 helicopter visibility reduction below ¾ SM NA.

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C or above 54°C.


⚠

For inop ALS, increase LPV all Cats visibility to RVR 4500, increase LNAV/VNAV all Cats visibility to RVR 5000, increase LNAV Cat A/B visibility to RVR 5500 and Cats C/D to 1¾ SM. In minimum visibility conditions, bright lights on highway ½ mile south of airport may be mistaken for runway lights.

MALSR

MISSED APPROACH:
Climb to 1500 direct MSHEL, cross MSHEL at 1500, then climb to 1600 on track 039° to OVIDO and hold.

ATIS 127.25	ORLANDO APP CON 119.4 351.9 (7) 125.225 351.9 (25)	EXECUTIVE TOWER ★ 118.7 (CTAF) 0 239.0	GND CON 121.4 239.0	UNICOM 122.95
-----------------------	--	---	-------------------------------	-------------------------

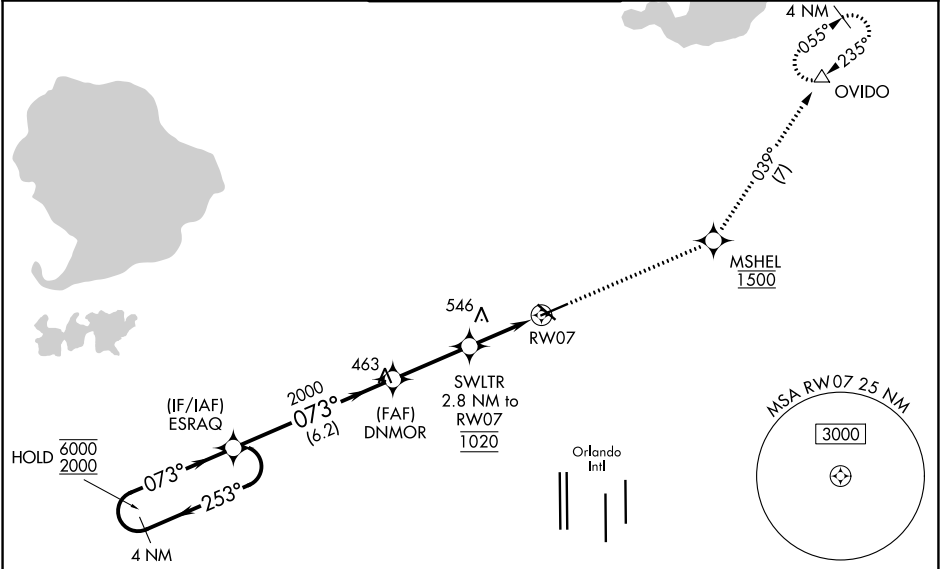

ELEV 113

TDZE 109

4 NM Holding Pattern

ESRAQ

DNMR

MSHEL 1500

SWLTR 2.8 NM to RWY 07

RWY 07

OVIDO

6000 2000

GP 3.00° TCH 52

253°

073°

2000

1020

1.9 NM to RWY 07

0.9

1.9

CATEGORY	A	B	C	D
LPV DA		391/40	282 (300-¾)	
LNAV/VNAV DA		447/40	338 (400-¾)	
LNAV MDA	740/40	631 (700-¾)	740-1⅜	631 (700-1⅜)
CIRCLING	740-1	627 (700-1)	860-2¼ 747 (800-2¼)	860-2½ 747 (800-2½)

REIL Rwy 25, 13 and 31

HIRL Rwy 7-25 and 13-31

SE-3, 03 SEP 2026 to 01 OCT 2026

SE-3, 03 SEP 2026 to 01 OCT 2026