





WAAS CH 73008 W15A	APP CRS 151°	Rwy Ldg TDZE Apt Elev	5431 352 352
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 15

RED BLUFF MUNI (RBL)

RNP APCH.	⚠ Circling to Rwy 33 NA at night. Baro-VNAV and VDP NA when using Redding altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. When local altimeter setting not received; use Redding altimeter setting and increase LPV DA to 674 feet and increase LNAV/VNAV DA to 860 feet and increase visibility all Cats ½ SM; increase all MDAs 80 feet and LNAV visibility C/D ½ SM and Circling visibility C/D ½ SM.	MISSED APPROACH: Climb to 3500 direct TOWAN and hold.
-----------	--	---

ASOS 120.775	OAKLAND CENTER 132.2 350.3	UNICOM 123.0 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

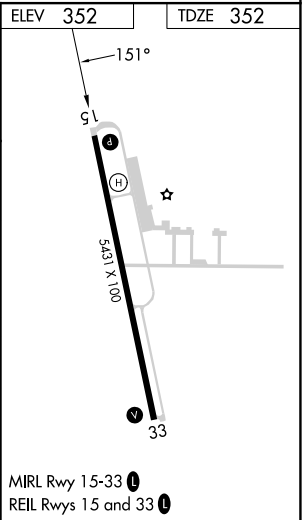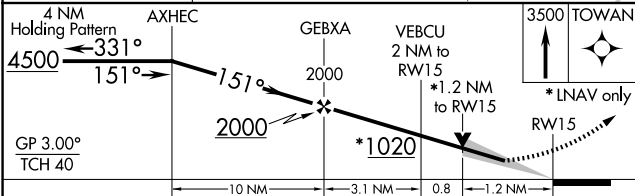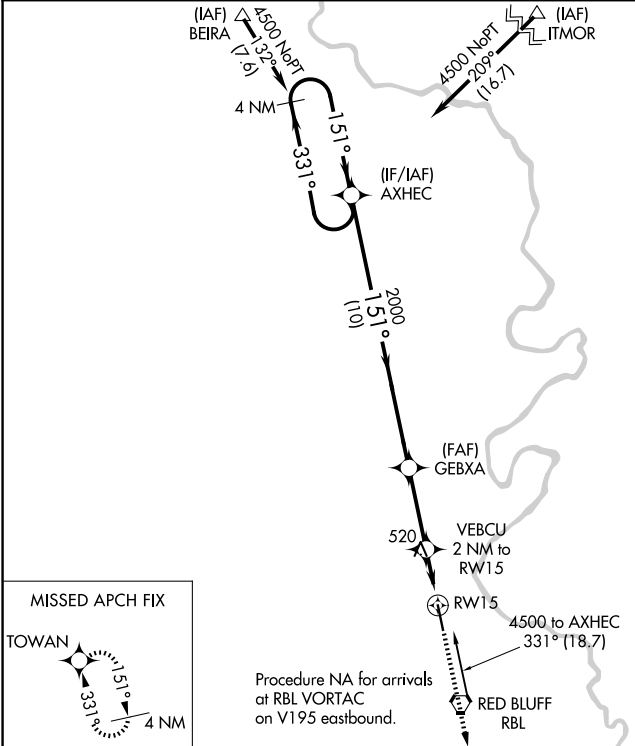

CATEGORY	A	B	C	D
LPV DA	602-7/8 250 (300-7/8)			
LNAV/VNAV DA	788-1 4/4 436 (500-1 1/4)			
LNAV MDA	780-1 428 (500-1)		780-1 1/4 428 (500-1 1/4)	
CIRCLING	860-1 508 (600-1)		900-1 1/2 548 (600-1 1/2)	1060-2 1/4 708 (800-2 1/4)