

WAAS CH 49216 W27A	APP CRS 270°	Rwy Ldg TDZE 6765 Apt Elev 6765
--	------------------------	---

RNAV (GPS) RWY 27

SOUTHWEST WYOMING RGNL (RKS)

RNP APCH.

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C or above 44°C. For inop ALS increase LNAV/VNAV all Cats visibility to ¾ SM.


MALSR

AS

MISSED APPROACH: Climb to 9800

direct REGVE and hold.

AWOS-3 118.375	SALT LAKE CENTER 124.35 353.5	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

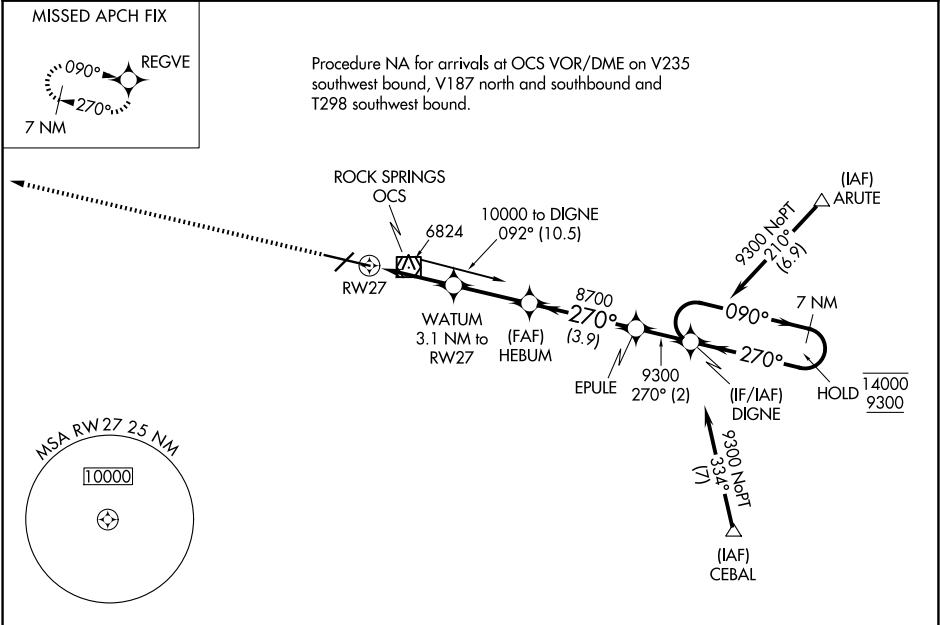

ELEV 6765

D

TDZE 6765

9800

REGVE

*LNAV only.

WATUM
3.1 NM to RW27

HEBUM
8700

EPULE
9300

DIGNE
9300

7 NM Holding Pattern

0.9 NM

2.2 NM

2.8 NM

3.9 NM

2 NM

CATEGORY

A

B

C

D

LPV DA

6965-½ 200 (200-½)

LNAV/VNAV DA

7036-½ 271 (300-½)

LNAV MDA

7100-½ 335 (400-½)

CIRCLING

7140-1
375 (400-1)

7220-1
455 (500-1)

7220-1½
455 (500-1½)

7540-2 ½
775 (800-2 ½)

0.3% UP

0.3% UP

0.4% DOWN

5228 X 15

10002 X 130

270°

GP 3.00°

TCH 55

MIRL Rwy 3-21

HIRL Rwy 9-27

REIL Rws 3 and 21