

WAAS CH 70402 W35A	APP CRS 350°	Rwy Ldg 10008 TDZE 3671 Apt Elev 3671
--	------------------------	--

RNAV (GPS) RWY 35
ROSWELL AIR CENTER (ROW)

RNP APCH - GPS.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C.
▲ When local altimeter setting not received, use ATS altimeter setting: increase LPV DA to 4001 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 4033 feet; increase all MDAs 80 feet and LNAV visibility Cat C ½ SM and Circling visibility Cat D ¼ SM.
ASR Baro-VNAV and VDP NA when using ATS altimeter setting.


MISSED APPROACH: Climb to 6000 direct HOG/G and hold.

ATIS 128.45 306.2	ROSWELL APP CON ★ 119.6 239.0	ROSWELL TOWER ★ 118.5 (CTAF) 0 233.7	GND CON 121.9 348.6	UNICOM 122.95
----------------------	----------------------------------	---	------------------------	------------------


MISSED APCH FIX




Procedure NA for arrivals at CME VORTAC
via V291 northwest bound.

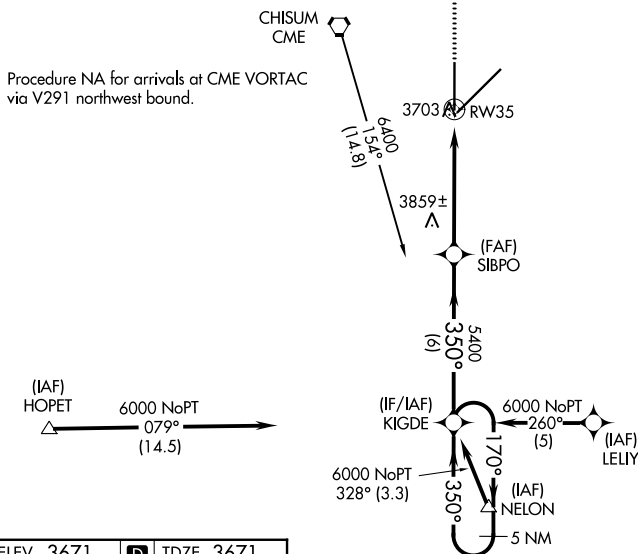


6000
227°
(8.3)



ELEV 3671	D	TDZE 3671
-----------	----------	-----------

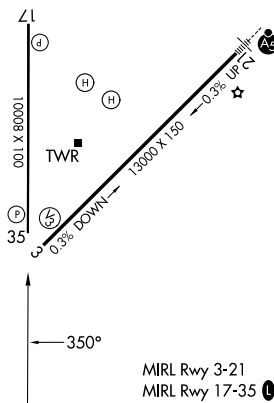

6000	HOGIG
	

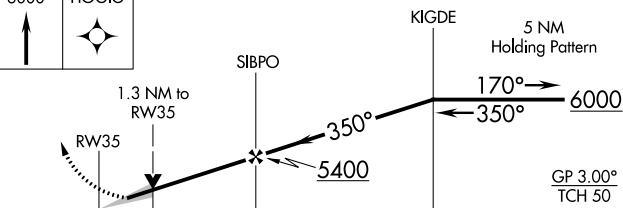

CATEGORY		A	B	C	D
LPV	DA	3921- ³ / ₄ 250 (300- ³ / ₄)			
LNAV/ VNAV	DA	3953-1 282 (300-1)			
LNAV	MDA	4120-1	449 (500-1)	4120-1 ³ / ₈ 449 (500-1 ³ / ₈)	4120-1 ¹ / ₂ 449 (500-1 ¹ / ₂)
CIRCLING		4140-1	469 (500-1)	4140-1 ¹ / ₂ 469 (500-1 ¹ / ₂)	4300-2 629 (700-2)