


WAAS CH 77613 W04A	APP CRS 037°	Rwy Ldg TDZE Apt Elev	8505 786 809
--	------------------------	-----------------------------	---


RNAV (GPS) Y RWY 4
SAN ANTONIO INTL (SAT)

RNP APCH - GPS.	MALS 	MISSED APPROACH: Climb to 3500 direct BISGE and track 030° to SHEPE and hold.
Circling NA northwest of Rwy 4 and 13R. Inop table does not apply to LPV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000. Increase LNAV Cats A/B visibility to RVR 5500 and LNAV Cats C/D visibility to 1% SM.		

D-ATIS 118.9	SAN ANTONIO APP CON 125.1 307.0	SAN ANTONIO TOWER 119.8 257.8	GND CON 121.9 348.6
------------------------	---	---	-------------------------------

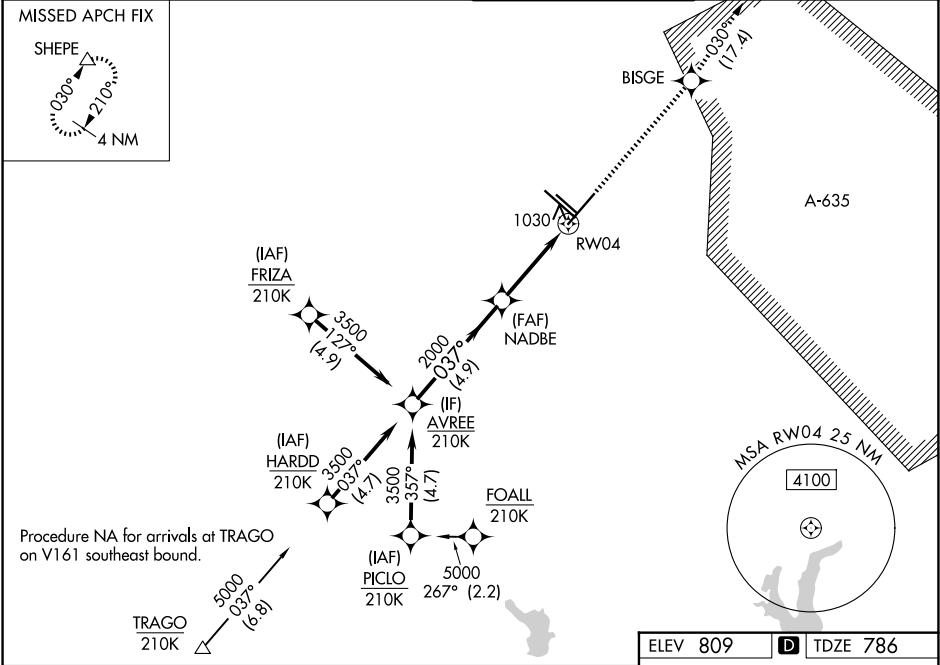

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 79).				
3500				
037°				
NADBE				
2000				
1.3 NM to RW04				
RW04				
GP 3.00° TCH 56				
4.9 NM				
2.3 NM				
1.3 NM				
CATEGORY	A	B	C	D
LPV DA	986/40		200 (200-¾)	
LNAV/VNAV DA	1201/50		415 (400-1)	
LNAV MDA	1280/40	494 (500-¾)	1280/60	494 (500-1¼)
CIRCLING	1280-1 471 (500-1)	1340-1 531 (600-1)	1420-1¾ 611 (700-1¾)	1520-2¼ 711 (800-2¼)

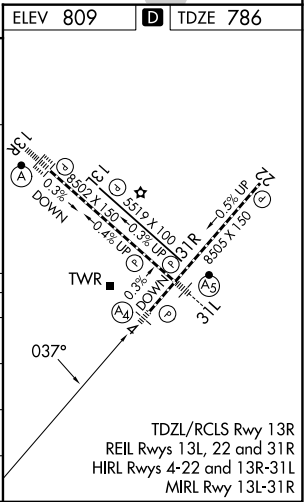

SC-3, 03 SEP 2026 to 01 OCT 2026

SC-3, 03 SEP 2026 to 01 OCT 2026