


SEGUL ONE DEPARTURE (RNAV)

AL-375 (FAA)

**TOP ALTITUDE:
ASSIGNED BY ATC**

RADAR required for non-GPS equipped aircraft.

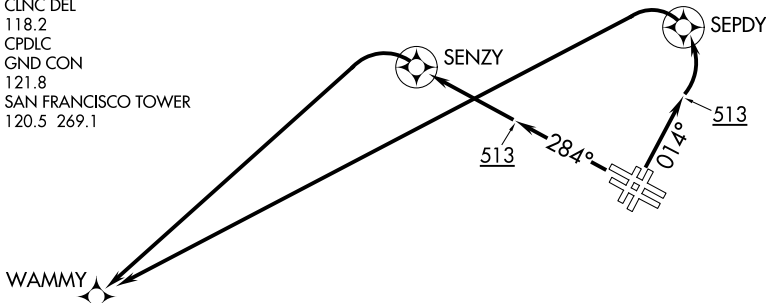



TAKEOFF RUNWAYS 1L/R: Climb on heading 014° to 513, then left turn direct SEPDY, then left turn direct WAMMY, then on track 154° to cross SEGUL at or above 16000, thence

TAKEOFF RUNWAYS 28L/R: Climb on heading 284° to 513, then direct SENZY, then left turn direct WAMMY, then on track 154° to cross SEGUL at or above 16000, thence

. . . . on YYUNG Transition. Maintain ATC assigned altitude, expect filed altitude 10 minutes after departure.

YYUNG TRANSITION (SEGUL1.YYUNG)

Rwy 28L: Standard with minimum climb of 353'/NM to 1200.
Rwy 28R: Standard with minimum climb of 361'/NM to 1100.

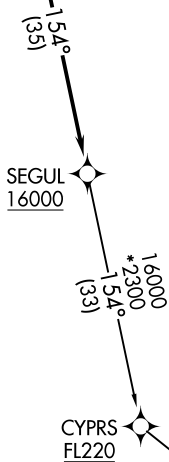

NOTE: Chart not to scale.

YYUNG 

SEGUL ONE DEPARTURE (RNAV)

(SEGUL1.SEGUL) 11JUL24

SAN FRANCISCO, CALIFORNIA
SAN FRANCISCO INTL (SFO)

SW-2, 03 SEP 2026 to 01 OCT 2026