# RNAV (GPS) RWY 12

## SCOTTSBLUFF/WESTERN NEBRASKA RGNL/WM B HEILIG FLD (BFF)

| WAAS | APP CRS | Rwy Ldg | 8279 |
|---|---|---|---|
| CH 73005 | 126° | TDZE | 3963 |
| W12A | | Apt Elev | 3967 |

RNP APCH - GPS.

When local altimeter setting not received, use AIA altimeter setting: increase LPV DA to 4304 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 4431 feet and all visibilities ¼ SM; increase all MDAs 100 feet and LNAV visibility Cats B/C ¼ SM, LNAV visibility Cat D ⅛ SM and Circling all Cats visibilities ½ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to 1 SM and LNAV Cats C/D visibility to 2 SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. Baro-VNAV and VDP NA when using AIA altimeter setting.

MALSR

MISSED APPROACH: Climb to 6700 direct HAKAB and hold.

| ASOS | DENVER CENTER | UNICOM |
|---|---|---|
| 121.025 | 127.95 338.2 | 123.0 (CTAF) L |

Procedure NA for arrivals at ALBIN V81 southwest bound and arrivals at SPONS V81-V169 northbound.

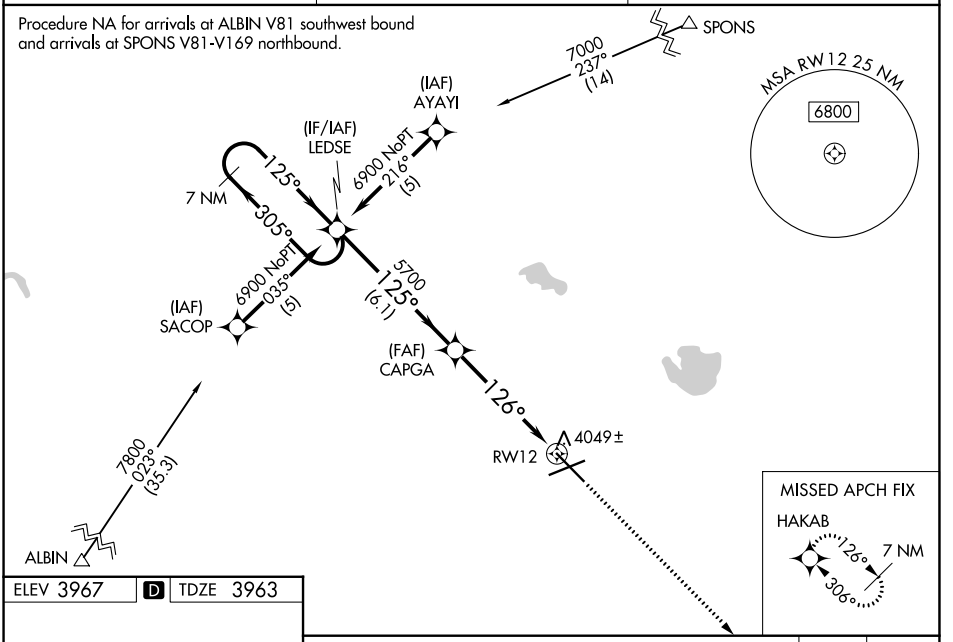


ELEV 3967 D TDZE 3963




HIRL Rwy 12-30 L
MIRL Rwy 5-23 L

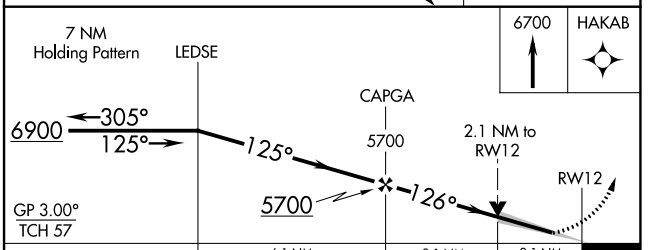


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 4213-½ 250 (300-½) | | | |
| LNAV/VNAV DA | 4340-¾ 377 (400-¾) | | | |
| LNAV MDA | 4700-½ 737 (800-½) | | 4700-1⅝ 737 (800-1⅝) | 4700-1¾ 737 (800-1¾) |
| CIRCLING | 4700-1 733 (800-1) | | 4700-2 733 (800-2) | 4740-2½ 773 (800-2½) |



NC-2, 03 SEP 2026 to 01 OCT 2026
NC-2, 03 SEP 2026 to 01 OCT 2026