WAAS	APP CRS	Rwy Ldg	8279
CH 53306	306°	TDZE	3952
W30A		Apt Elev	3967

RNAV (GPS) RWY 30

SCOTTSBLUFF/WESTERN NEBRASKA RGNL/WM B HEILIG FLD (BFF)

When local altimeter setting not received, use Alliance altimeter setting: increase LPV DA to 4293 feet and visibility ¼ SM; increase LNAV/VNAV DA to 4392 feet and visibility ¼ SM; increase all MDAs 100 feet and visibility Cats C and D ½ SM. For inoperative MALSR, when using alliance altimeter setting, increase LPV all Cats visibility to 1¼. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 41°C (105°F). Baro-VNAV NA when using Alliance altimeter setting. VDP NA when using Alliance altimeter setting. DME/DME RNP-0.3 NA.

MALSR

MISSED APPROACH: Climb to 6900 direct LEDSE and hold.

ASOS	DENVER CENTER	UNICOM
121.025	127.95 338.2	123.0 (CTAF) L

MISSED APCH FIX

7 NM 125° 305° LEDSE

Procedure NA for arrivals at Alliance VOR/DME V100 northeast bound.

ALLIANCE AIA

RW30 3999±

6800 226° (28.3)

(FAF) CIYAR

5700 306° (6.2)

(IAF) DIVPE

6700 NoPT 216° (5)

(IF/IAF) HAKAB

126° 306° 7 NM

MSA RW30 25 NM 6800

(IAF) FOBVO

6700 NoPT 036° (5)

7800 061° (38.5)

ALBIN

Procedure NA for arrivals at ALBIN V81 southwest bound and V6 westbound.

ELEV 3967 D TDZE 3952



HIRL Rwy 12-30 L

MIRL Rwy 5-23 L

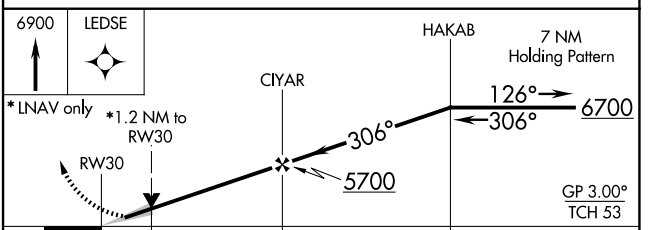

CATEGORY	A	B	C	D
LPV DA	4202-½ 250 (300-½)			
LNAV/VNAV DA	4301-¾ 349 (400-¾)			
LNAV MDA	4380-½ 428 (500-½)		4380-¾ 428 (500-¾)	4380-1 428 (500-1)
CIRCLING	4500-1 533 (600-1)		4560-1½ 593 (600-1½)	4740-2½ 773 (800-2½)

NC-2, 03 SEP 2026 to 01 OCT 2026
NC-2, 03 SEP 2026 to 01 OCT 2026