


WAAS CH 81920 W03A	APP CRS 031°	Rwy Ldg TDZE 2385 Apt Elev 2385	11002 2385 2385
--	------------------------	---	--


RNAV (GPS) Y RWY 3
SPOKANE INTL (GEG)

RNP APCH - GPS. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 53°C. For inop ALS increase LNAV/VNAV all Cats visibility to 1½ SM and increase LNAV Cats C and D visibility to 1¾ SM.	ALSF-2 A	MISSED APPROACH: Climb to 8200 direct LUCEV and hold, continue climb-in-hold to 8200.
--	-------------	---

ATIS 124.325 254.375	SPOKANE APP CON 123.75 282.25 (205°-025°) 133.35 263.0 (026°-204°)	SPOKANE TOWER 118.3 278.3	GND CON 121.9 348.6
--------------------------------	--	-------------------------------------	-------------------------------

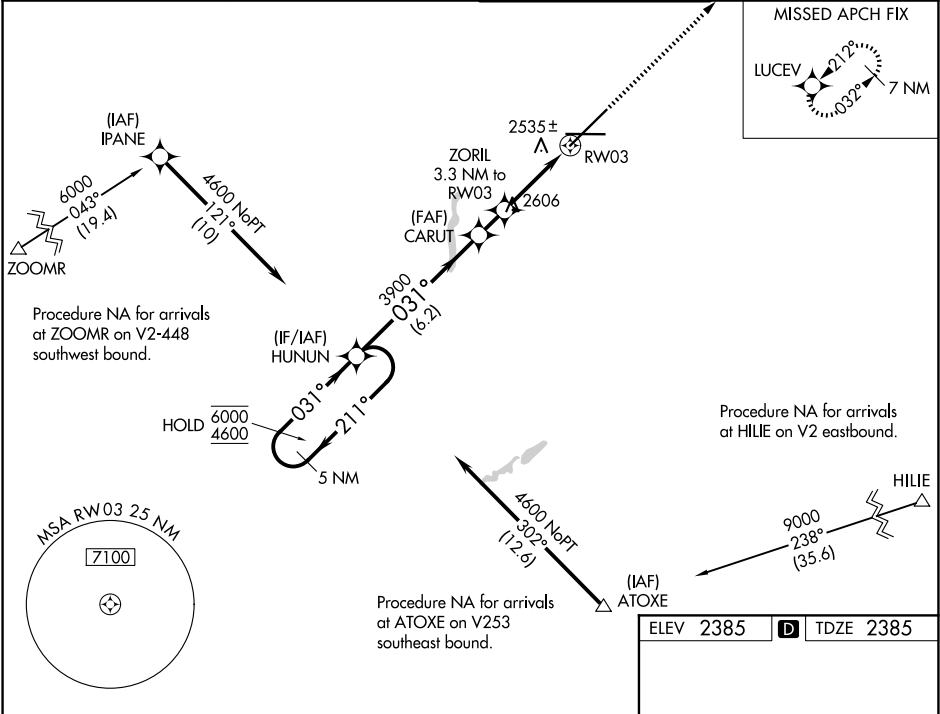

5 NM Holding Pattern		HUNUN		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69).		8200	LUCEV
6000	← 211°						

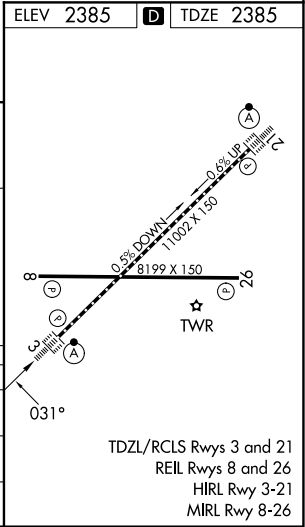

NW-1, 03 SEP 2026 to 01 OCT 2026

NW-1, 03 SEP 2026 to 01 OCT 2026