

LOC I-SSC 110.1	APCH CRS 043°	Rwy Idg 10,014	4R 8014
		TDZE 240	236
		Arpt Elev 241	241

[USAF]

SHAW AFB (KSSC)

RADAR or DME required. RADAR required when R-6002 active.

* When ALS inop, increase vis to 1½ miles.

ALSF-1



MISSED APPROACH: Climbing to 2000, intercept SSC TACAN R-042 to GABLE and hold.

ATIS ★ 132.125 270.1	APP CON ★ 125.4 318.1	TOWER ★ 126.65 254.25	GND CON 126.1 275.8
--------------------------------	---------------------------------	---------------------------------	-------------------------------

CAUTION: When Rwy 22L VGSi inop, circling to Rwy 22L NA at night. Terrain 239' MSL, 200' prior to threshold, 200' right of course.

USAF Only: When VGSi inop, straight-in Rwy 4L authorized at night with MAJCOM A3 approval.

1400

CAUTION: When VGSi inop, procedure NA at night.

2047

LOCALIZER 110.1
I-SSC

SSC 18
R-042
825
GABLE
SSC 11

SHAW
Chan 38 SSC

EEGAL
RADAR
SSC 4.9



CAVEG
SSC 1.8

WUXEV
SSC 11

(IAF)
JUMUB
SSC 23
11,000

Remain West
of SSC R-215

EMERG SAFE ALT 100 NM 3800

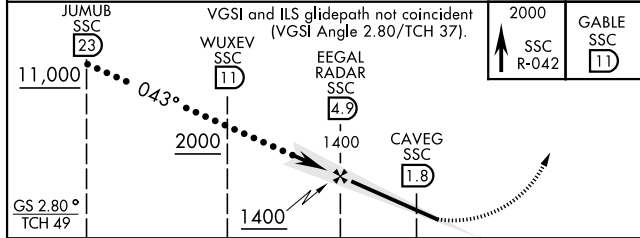

CATEGORY	C	D	E
S-ILS 4L *	490/50	250	(300-1)
S-LOC 4L *	780/55	540	(600-1)
SIDESTEP * 4R	780-1 3/8	544	(600-1 3/8)
CIRCLING	1000-2 1/4 759 (800-2 1/4)	1000-2 1/2 759 (800-2 1/2)	1000-2 3/4 759 (800-2 3/4)

