


HI-TACAN Z RWY 4L

TACAN SSC Chan 38	APCH CRS 043°	Rwy Idg TDZE Arpt Elev	4L 10,014 240 241	4R 8014 236 241	[USAF]	SHAW AFB (KSSC)
RADAR required when R-6002 active.					ALSF-1	MISSED APPROACH: Climbing to 2000, intercept SSC TACAN R-042 to GABLE and hold.
* When ALS inop, increase vis to 1½ miles.					A1	

ATIS★ 132.125 270.1	APP CON★ 125.4 318.1	TOWER★ 126.65 254.25	GND CON 126.1 275.8
------------------------	-------------------------	-------------------------	------------------------

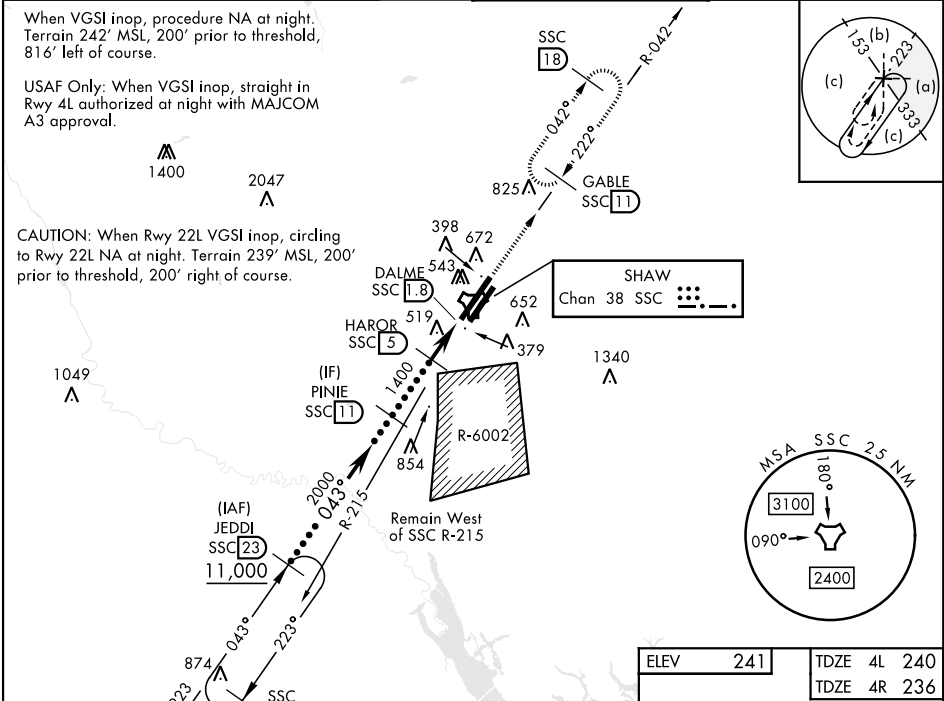

JEDDI SSC 23	PINIE SSC 11	HAROR SSC 5	DALME SSC 1.8	GABLE SSC 11
11,000	2000	1400	2000	2200
043°	043°	043°	043°	043°
874	2000	1400	854	652
R-223	R-043	R-215	R-042	R-042
SSC 23	SSC 11	SSC 5	SSC 1.8	SSC 11
SSC 33				
2.82° TCH 36				
3.2 NM			0.6	
CATEGORY	C	D	E	
S-4L*	800/60	560 (600-1½)		
SIDESTEP 4R*	800-1½	564 (600-1½)		
CIRCLING	1000-2¼ 759 (800-2¼)	1000-2½ 759 (800-2½)	1000-2¾ 759 (800-2¾)	

HI-TACAN Z RWY 4L