RNAV (GPS) RWY 1

RONALD REAGAN WASHINGTON NTL (DCA)

WAAS	APP CRS	Rwy Ldg	6869
CH 66047	007°	TDZE	14
W01A		Apt Elev	14

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Circling NA northeast of Rwy 15-33. Circling NA to Rwy 4. For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅜ SM.

ALSF-2

MISSED APPROACH: Climb to 420 then climbing left turn to 2200 direct GTN NDB and hold, continue climb-in-hold to 2200.

D-ATIS	POTOMAC APP CON	WASHINGTON TOWER	GND CON
132.65	119.85 239.25 (W/S) 124.2 360.8 (E)	119.1 257.6	121.7 257.6

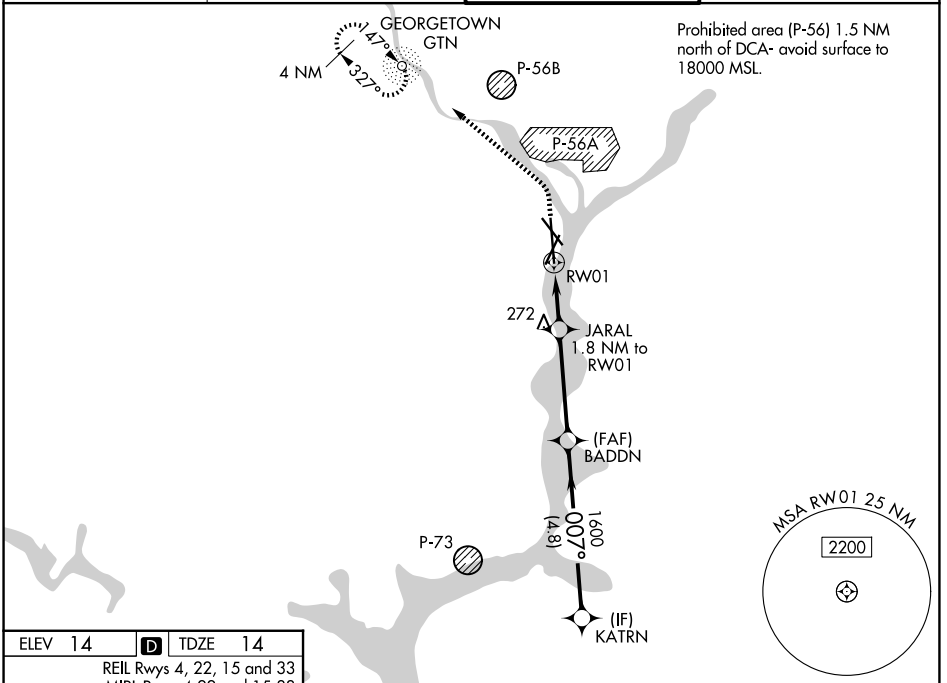

ELEV 14 | D | TDZE 14

REIL Rwys 4, 22, 15 and 33
MIRL Rwys 4-22 and 15-33
HIRL Rwy 1-19
TDZL/RCLS Rwy 1

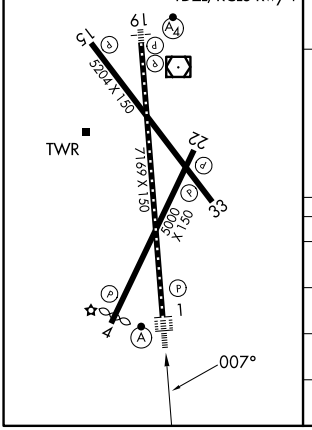

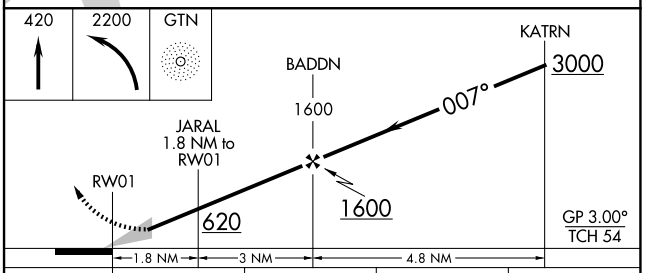

CATEGORY	A	B	C	D
LPV DA	214/18 200 (200-½)			
LNAV/VNAV DA	497/50 483 (500-1)			
LNAV MDA	540/24 526 (600-½)		540/55 526 (600-1)	
CIRCLING	720-1 706 (800-1)	900-1¼ 886 (900-1¼)	900-2¾ 886 (900-2¾)	900-3 886 (900-3)

NE-3, 03 SEP 2026 to 01 OCT 2026
NE-3, 03 SEP 2026 to 01 OCT 2026