

WAAS
CH **82614**
W35A

APP CRS
354°

Rwy Ldg **6893**
TDZE **1745**
Apt Elev **1749**

RNAV (GPS) RWY 35
WATERTOWN RGNL (ATY)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM.

MALSR

MISSED APPROACH: Climb to 3600 direct BOBDE and hold.

ASOS 126,625	MINNEAPOLIS CENTER 128.5 306.2	UNICOM 123,05 (CTAF) 0
------------------------	--	----------------------------------

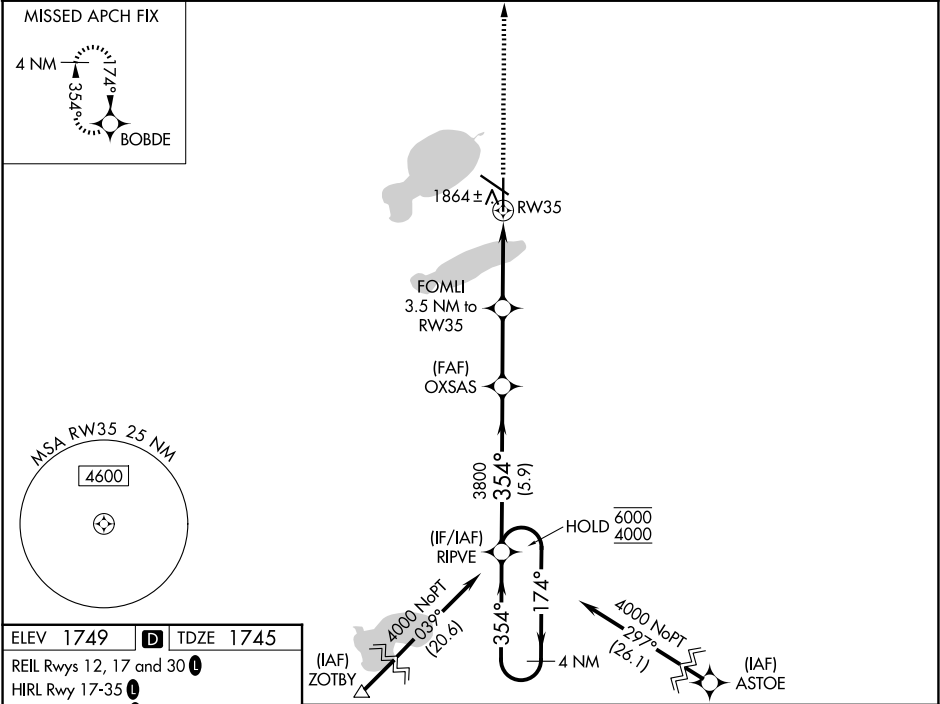

4 NM Holding Pattern		RIPVE		OXSAS		FOMLI 3.5 NM to RW35		1.1 NM to RW35		3600	BOBDE
6000 ← 174°		354° →		354°		3800		2900			
GP 3.00°		TCH 53		5.9 NM		2.8 NM		2.4 NM		1.1 NM	
CATEGORY	A	B		C		D					
LPV DA	1945-½ 200 (200-½)										
LNAV/VNAV DA	2180-¾ 435 (500-¾)										
LNAV MDA	2160-½		415 (500-½)		2160-¾		415 (500-¾)				
CIRCLING	2260-1		511 (600-1)		2500-2¼ 751 (800-2¼)		2500-2½ 751 (800-2½)				