

WAAS CH 93831 W13A	APP CRS 132°	Rwy Ldg TDZE Apt Elev	5003 2822 2822
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13


WINKLER COUNTY (INK)

RNP APCH - GPS.

T Baro-VNAV NA when using Pecos altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. VDP NA with Pecos altimeter setting. Rwy 13 helicopter visibilities reduction below ¾ SM NA. When local altimeter setting not received, use Pecos altimeter setting: increase LPV DA to 3167 feet and all Cats visibilities ¼ SM; increase LNAV/VNAV DA to 3167 feet and all Cats visibilities ¼ SM; increase all MDAs 100 feet and LNAV Cat C visibility ⅓ SM and Circling Cat C visibility ¼ SM.

MISSED APPROACH:
Climb to 5000 direct BORTY and hold.

ASOS 118.325	FORT WORTH CENTER 133.1 298.95	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

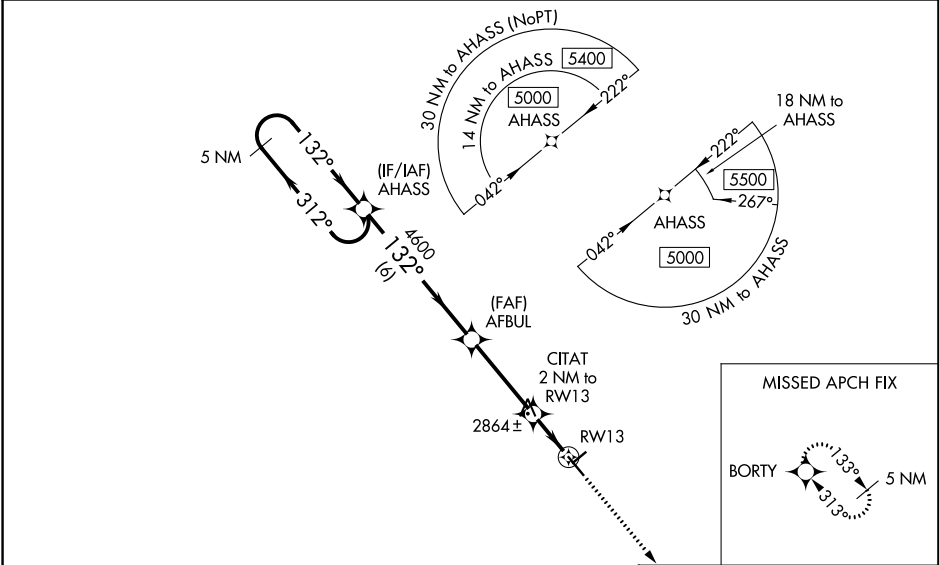

5 NM Holding Pattern		AHASS		AFBUL		CITAT		RWY 13	
5000		132°		4600		3500		0.8 NM to RWY 13	
GP 3.00°		TCH 45		6 NM		3.4 NM		1.2 NM	
CATEGORY		A		B		C		D	
LPV DA		3072-¾		250 (300-¾)				NA	
LNAV/VNAV DA		3072-¾		250 (300-¾)				NA	
LNAV MDA		3320-1		498 (500-1)		3320-1⅜		498 (500-1⅜)	
CIRCLING		3320-1		498 (500-1)		3580-2¼		758 (800-2¼)	
								MIRL Rwy 4-22 and 13-31 0	