

WAAS CH 90337 W34A	APP CRS 343°	Rwy Ldg TDZE 7280 Apt Elev 7289
--	------------------------	---

RNAV (GPS) RWY 34

KEMMERER MUNI (EMM)


▼

▲

Baro-VNAV and VDP NA when using Evanston altimeter setting.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C (-16°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.
Night landing: Rwy 4, 10, 22, 28 NA. When local altimeter setting not received, use Evanston altimeter setting: increase all DA 111 feet and visibilities 1/8 mile; increase all MDA 120 feet.

MISSED APPROACH: Climb to 12000 direct ATOXY and on track 268° direct GEGME and hold, continue climb-in-hold to 12000.

AWOS-3PT 119.675	SALT LAKE CITY CENTER 124.35 353.5	UNICOM 122.8 (CTAF) ①
----------------------------	--	---------------------------------

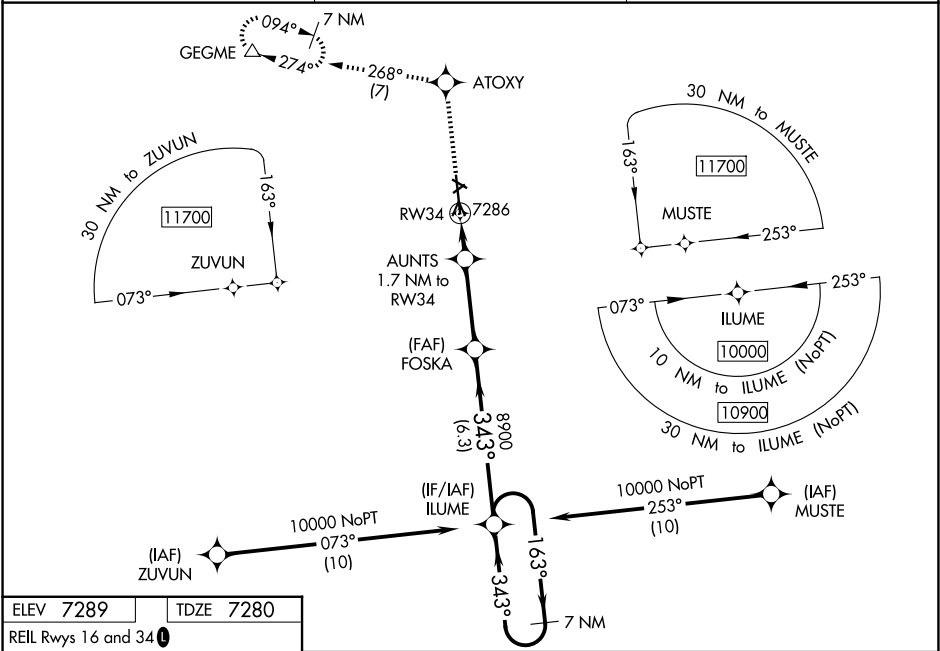

12000		ATOXY	fr 268°	GEGME	VGSi and RNAV glidepath not coincident (VGSi Angle 3.25/TCH 61).	
*LNAV only.		AUNTS	1.7 NM to RW34	FOSKA	ILUME	7 NM Holding Pattern
0.6 NM to RW34		RW34	7860	8900	8900	GP 3.00° TCH 60
0.6		1.1 NM	3.3 NM	6.3 NM		
CATEGORY	A		B		C	D
LPV DA	7530-1		250 (300-1)		NA	
LNAV/VNAV DA	7530-1		250 (300-1)		NA	
LNAV MDA	7540-1		260 (300-1)		NA	
CIRCLING	7660-1 371 (400-1)		8240-1½ 951 (1000-1½)		NA	