CLOVIS, NEW MEXICO

ILS or LOC RWY 4

CANNON AFB (KCVS)

LOC I-GLO	APCH CRS	Rwy ldg 10,001 / TDZE 4284 / Arpt Elev 4295
108.5	038°	[USAF]

RADAR or DME required. Missed approach requires use of RNAV or RADAR monitoring.

*When ALS inop, increase all CAT RVR to 40 and vis to ¾ miles.

ALSF-1

MISSED APPROACH: Climb to 6000 out CVS TACAN R-036 to 5 DME (FETEP) turning left climb to 7000 intcp CVS R-003 to 12 DME (HEDOB) and hold.

ATIS	APP CON	TOWER	GND CON
119.1 269.9	118.425 352.1	120.4 270.25	121.9 275.8

**When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE RVR to 60 and vis to 1⅛ miles.

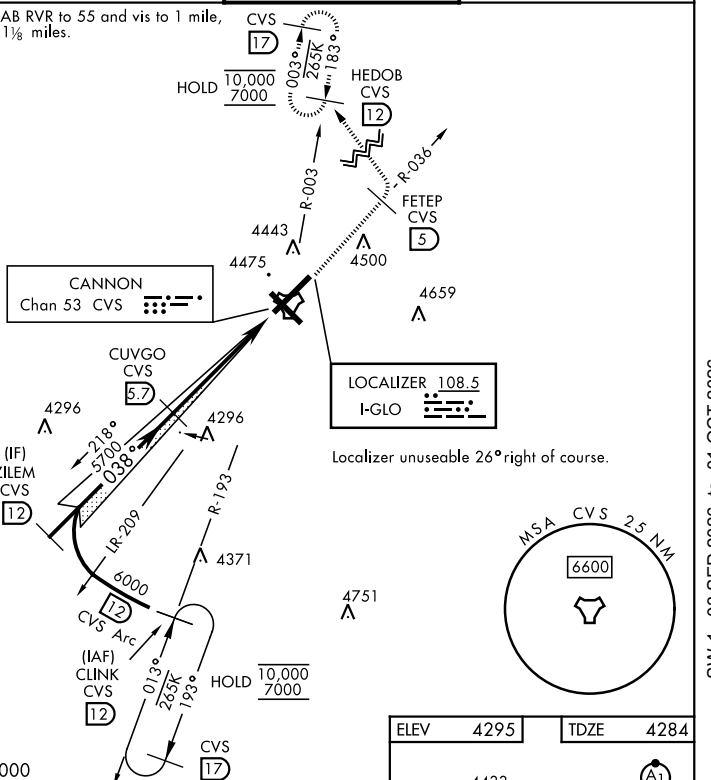

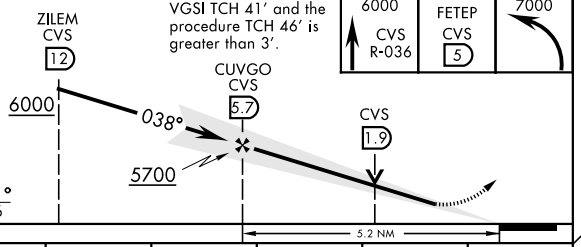

VGSI TCH 41′ and the procedure TCH 46′ is greater than 3′.

6000	FETEP	7000
CVS R-036	CVS 5	



CATEGORY	A	B	C	D	E
S-ILS 4 *	4484/24		200		(200-½)
S-LOC 4 **	4680/24	396 (400-½)	4680/35	396 (400-⅝)	
CIRCLING	4840-1	545 (600-1)	4860-1½ 565 (600-1½)	5000-2¼ 705 (800-2¼)	5020-2½ 725 (800-2½)

HIRL all rwys

FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

SW-1, 03 SEP 2026 to 01 OCT 2026
SW-1, 03 SEP 2026 to 01 OCT 2026