RNAV (GPS) RWY 36

KEARNEY RGNL (EAR)

WAAS	APP CRS	Rwy Ldg	7094
CH 90113	002°	TDZE	2132
W36A		Apt Elev	2132

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ⅞ SM.

MALSR

MISSED APPROACH: Climb to 4700 direct HONVA and hold.

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
123.875	119.4 278.8	123.0 (CTAF) L

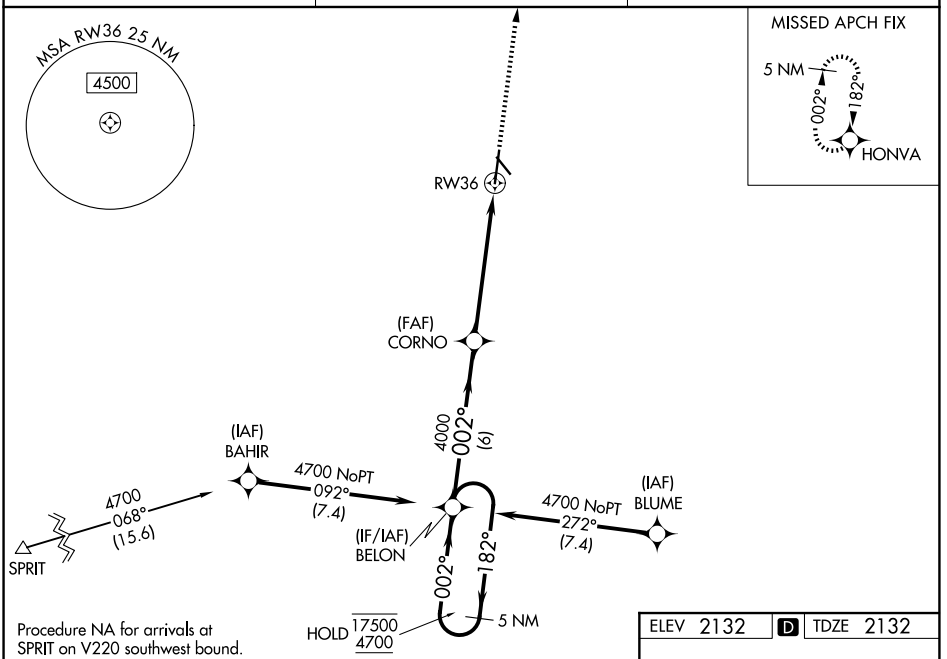

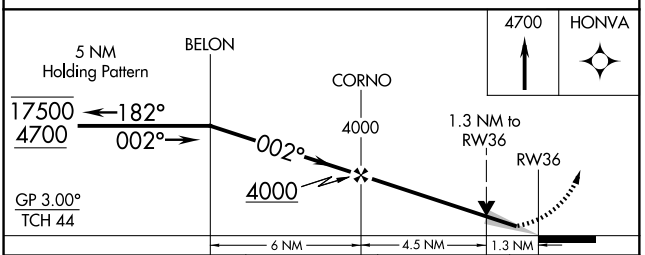

CATEGORY	A	B	C	D
LPV DA	2332-½ 200 (200-½)			
LNAV/VNAV DA	2419-½ 287 (300-½)			
LNAV MDA	2580-½ 448 (500-½)		2580-⅞ 448 (500-⅞)	
CIRCLING	2600-1 468 (500-1)		2640-1½ 508 (600-1½)	2840-2¼ 708 (800-2¼)

ELEV 2132 D TDZE 2132

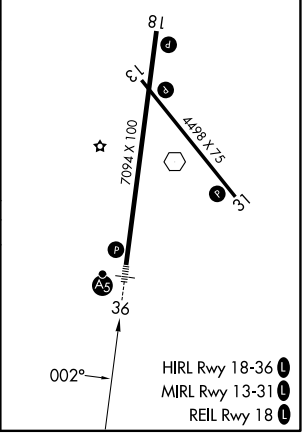

NC-2, 03 SEP 2026 to 01 OCT 2026
NC-2, 03 SEP 2026 to 01 OCT 2026