
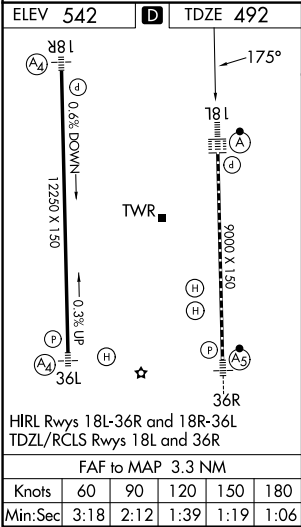


LOC/DME I-VNK 110.5 Chan 42	APP CRS 175°	Rwy Ldg TDZE 492 Apt Elev 542
---	------------------------	---

ILS or LOC RWY 18L
AUSTIN-BERGSTROM INTL (AUS)

RNP APCH-GPS. From HOUKM or JEDYE.	ALSIF-2 	MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 on heading 040° and CWK VORTAC R-088 to HOOKK/CWK 17 DME and hold.
RADAR required for procedure entry from DOFFS. DME required.		
Simultaneous approach authorized. For inop ALS, increase S-ILS-18L Cat E visibility to RVR 4000, and S-LOC-18L Cats C, D, and E visibility to RVR 5500.		

D-ATIS 124.4	AUSTIN APP CON 127.225 317.65 (E) 120.875 270.25 (S) 119.0 370.85 (W)	AUSTIN TOWER 121.0 281.5	GND CON 121.9 348.6
------------------------	---	------------------------------------	-------------------------------

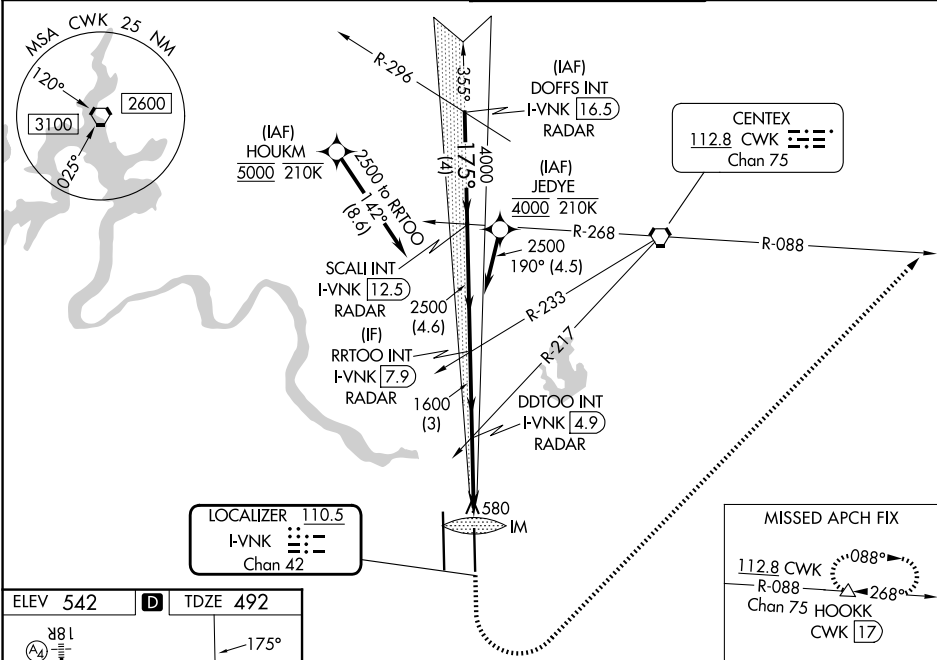

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 74).					
DOFFS INT I-VNK 16.5 (16.5) DOFFS INT RADAR	SCALI INT I-VNK 12.5 (12.5) SCALI INT RADAR	RRTOO INT I-VNK 7.9 (7.9) RRTOO INT RADAR	DDTOO INT I-VNK 4.9 (4.9) DDTOO INT RADAR	I-VNK 2.5 (2.5)	I-VNK 1.6 (1.6)
5000	4000	2500	1600	1600	IM
GS 3.00° TCH 61	4 NM	4.6 NM	3 NM	2.4 NM	0.8 0.1
CATEGORY	A	B	C	D	E
S-ILS 18L	692/18 200 (200-½)				
S-LOC 18L	840/24	348 (300-½)	840/30	348 (300-¾)	
CIRCLING	1040-1 498 (500-1)	1120-1 578 (600-1)	1200-1¾ 658 (700-1¾)	1200-2 658 (700-2)	NA

SC-3, 03 SEP 2026 to 01 OCT 2026

SC-3, 03 SEP 2026 to 01 OCT 2026