CAMP SPRINGS, MARYLAND

ILS or LOC RWY 19L

(USAF) JOINT BASE ANDREWS (ANDREWS AFB) (KADW)

LOC I-GQZ	APCH CRS	Rwy ldg	9756
110.5	190°	TDZE	279
		Arpt Elev	280

RADAR or DME required at FAF

* When ALS inop, increase RVR to 40, vis to 3/4.
** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CDE RVR to 60, vis to 1 1/8 mile.
*** Circling not authorized W of Rwy 1L-19R.

ALSF-1

MISSED APPROACH: Climb to 2500 via ADW R-189 to BRINE/ADW 12 DME and hold.

ATIS	POTOMAC APP CON	TOWER	GND CON
133.675 251.05	128.0 335.5	118.4 349.0	121.8 275.8

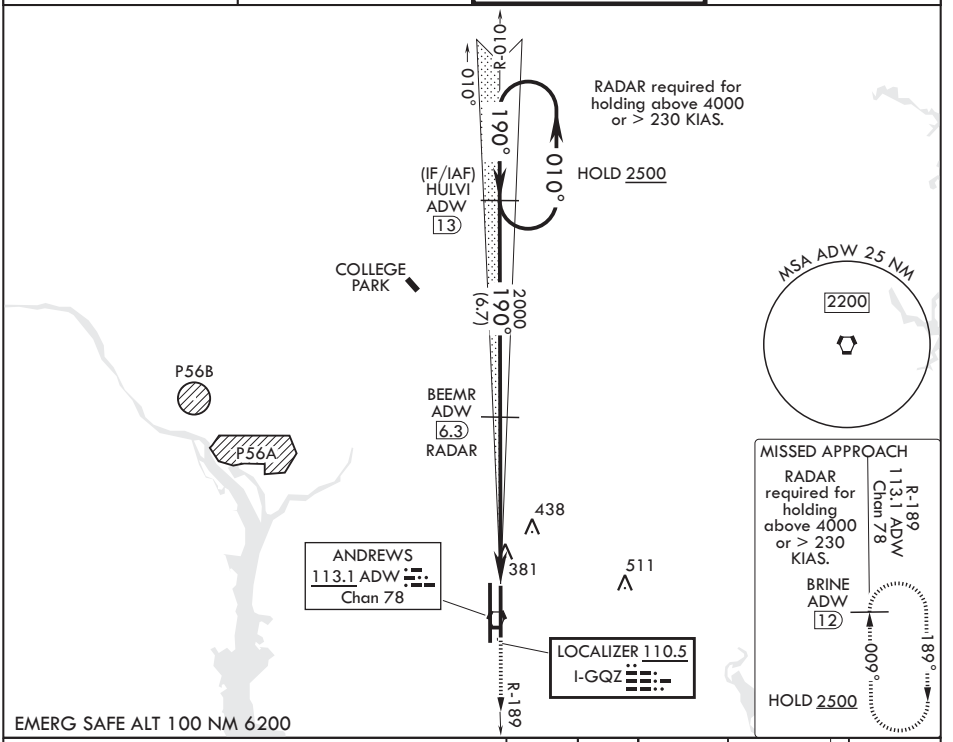

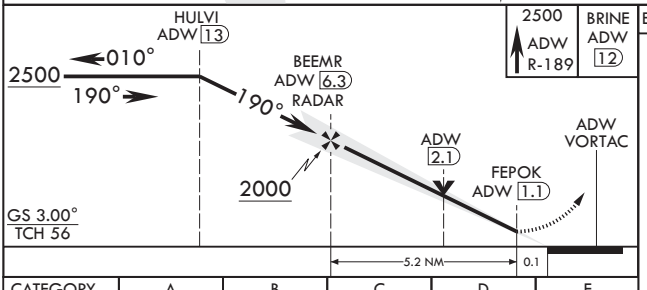

ELEV 280 TDZE 279



CATEGORY	A	B	C	D	E
S-ILS 19L*	479/24		200	(200-½)	
S-LOC 19L**	680/24	401 (400-½)	680/40	401	(400-¾)
CIRCLING***	780-1	500 (500-1)	780-1½ 500 (500-1½)	840-2	560 (600-2)

FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44