


WAAS CH 53704 W05A	APP CRS 046°	Rwy Ldg TDZE 572 Apt Elev 583
--	------------------------	---

RNAV (GPS) RWY 5


FREEMAN MUNI (SE.R)

RNP APCH - GPS.	ODALS	MISSED APPROACH: Climb to 2400 direct NAYIV and hold.
▼ NA Rwy 5 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LPV all Cats and LNAV Cats A/B. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV Cats C/D visibility to 1½ SM.	⊕ ⋮	

AWOS-3 119.425	LOUISVILLE APP CON 132.075 327.0	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

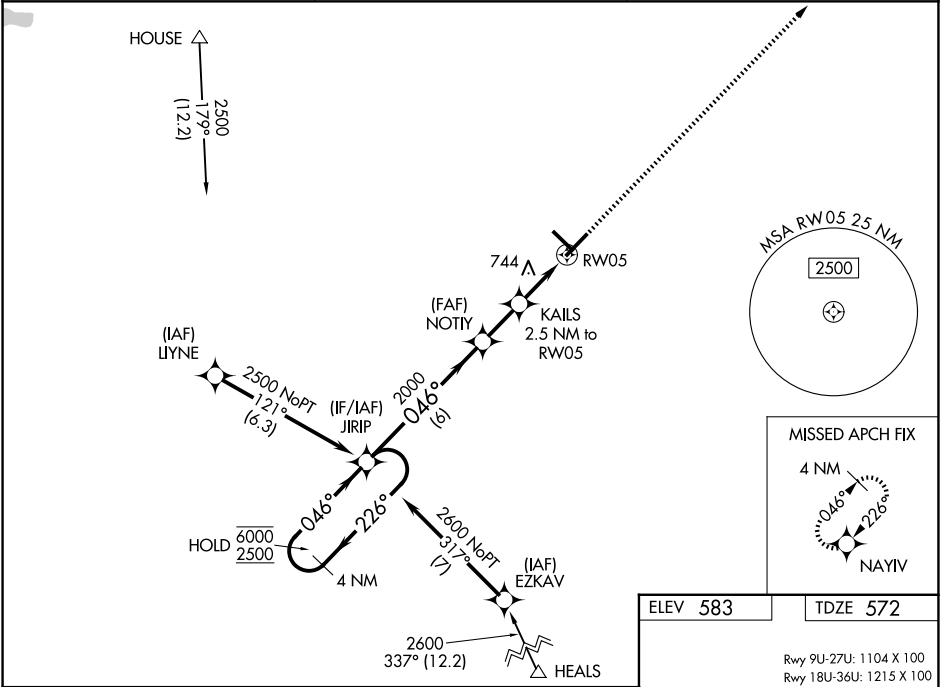

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 33).		2400	NAYIV
6000 2500		JIRIP	NOTY	KAILS	
GP 3.00° TCH 45		2000	2000	2.5 NM to RW05	
046°		046°	046°	1.3 NM to RW05	
		2000	1400	RW05	
		6 NM	1.9 NM	1.2 NM	1.3 NM
CATEGORY	A	B	C	D	
LPV DA	834-1		262 (300-1)		
LNAV/VNAV DA	1017-1½		445 (500-1½)		
LNAV MDA	1000-1	428 (500-1)	1000-1½	428 (500-1½)	
CIRCLING	1080-1 497 (500-1)	1140-1 557 (600-1)	1240-1¾ 657 (700-1¾)	1240-2 657 (700-2)	

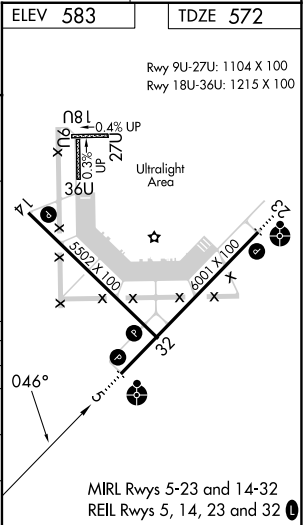

EC-2, 03 SEP 2026 to 01 OCT 2026

EC-2, 03 SEP 2026 to 01 OCT 2026