

WAAS CH 49217 W01A	APP CRS 003°	Rwy Ldg 5000 TDZE 372 Apt Elev 372
--	------------------------	---

RNAV (GPS) RWY 1

STURGIS MUNI (TWT)


▼

▲ NA

Baro-VNAV NA when using Henderson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Henderson altimeter setting and increase LPV DA to 708 and visibility all Cats to 1½ miles; increase LNAV/VNAV DA to 780 feet and visibility all Cats to 1¾ miles; increase all MDA 60 feet and Circling Cat C visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2500 direct
OLGEW and hold.

AWOS-3P 118.775	EVANSVILLE APP CON ★ 124.025 290.9	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

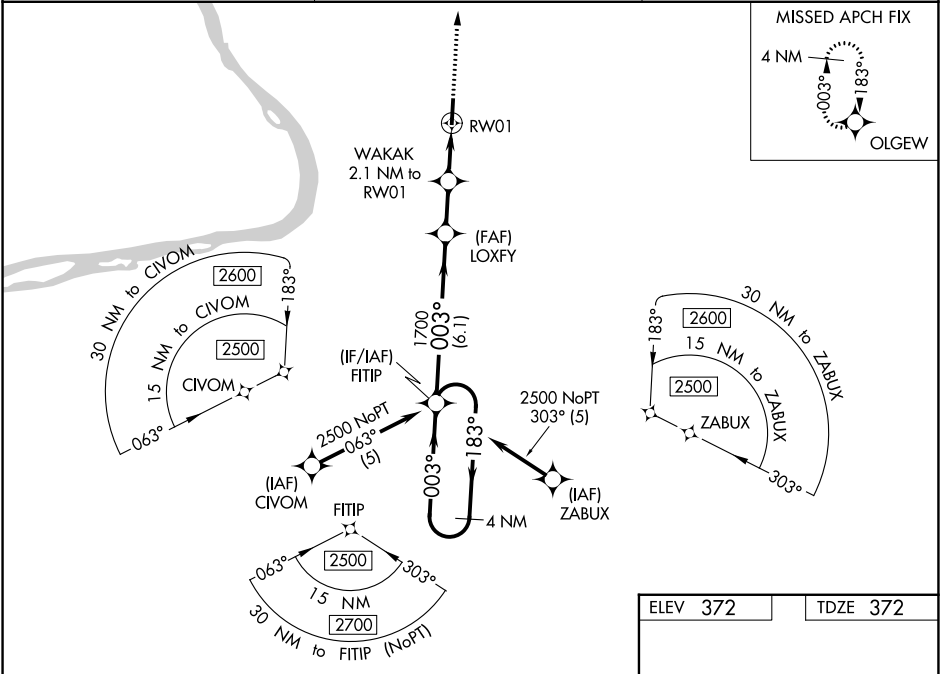

4 NM

Holding Pattern

FITIP

LOXFY

1700

WAKAK

2.1 NM to RW01

2500

183°

003°

003°

1700

*1080

RW01

GP 3.00°

TCH 45

2500

↑

OLGEW

✦

*LNAV only.

6.1 NM

1.9 NM

2.1 NM

CATEGORY	A	B	C	D
LPV DA	658-7⁄8 286 (300-7⁄8)			
LNAV/VNAV DA	730-1¼ 358 (400-1¼)			
LNAV MDA	820-1 448 (500-1)	820-1¾ 448 (500-1¾)		1120-2½ 748 (800-2½)
CIRCLING	860-1 488 (500-1)	1000-1 628 (700-1)	1000-1¾ 628 (700-1¾)	1120-2½ 748 (800-2½)

