

WAAS CH 87000 W11A	APP CRS 113°	Rwy Ldg 7011 TDZE 132 Apt Elev 132
--	------------------------	---

RNAV (GPS) RWY 11
LAURENCE G HANSCOM FLD (BED)

RNP APCH - GPS.




For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19° C or above 54° C.
For inop ALS, increase all LNAV/VNAV Cats visibility to RVR 5500.

MALSR




MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct ZIMOT and hold.


ATIS 124.6	BOSTON APP CON 124.4 279.6	HANSCOM TOWER ★ 118.5 (CTAF) 0 257.2	GND CON 121.7	UNICOM 122.95
---------------	-------------------------------	---	------------------	------------------

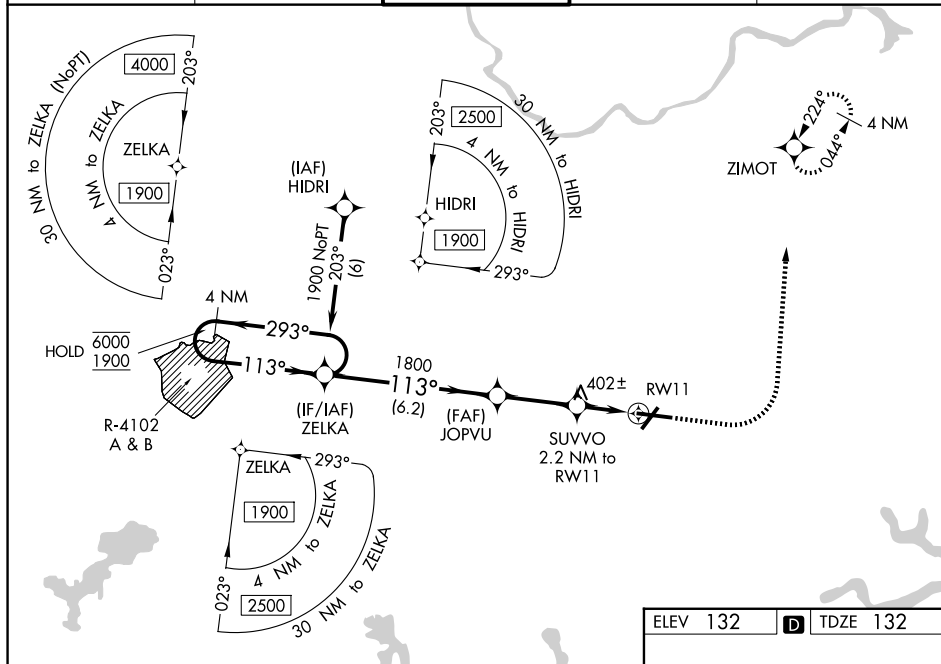

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 67).

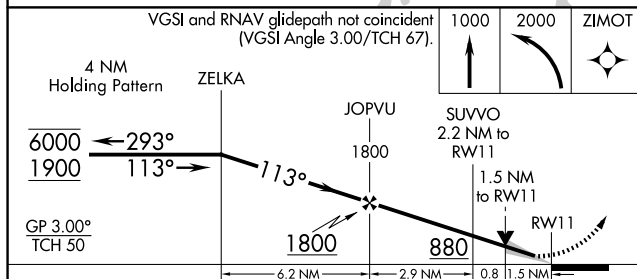

CATEGORY		A		B		C		D	
LPV	DA			384/24		252 (300-1/2)			
LNAV/ VNAV	DA			474/30		342 (400-5/8)			
LNAV	MDA	660/24		528 (600-1/2)		660/55		528 (600-1)	
CIRCLING		720-1		588 (600-1)		880-2 1/4 748 (800-2 1/4)		920-2 1/2 788 (800-2 1/2)	



MIRL Rwy 5-23 **L**
HIRL Rwy 11-29 **L**
REIL Rwy 5 and 23 **L**