

APP CRS	Rwy Ldg	5151
184°	TDZE	319
	Apt Elev	344


RNAV (GPS) RWY 18
READING RGNL/CARL A SPAATZ FLD (RDG)

RNP APCH - GPS.

▼ Straight-in Rwy 18 NA at night, Circling Rwy 18, 31 NA at night. Rwy 18 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use MDT altimeter setting and increase all MDAs 100 feet, and LNAV visibility Cat B ¼ SM, LNAV visibility Cat C ½ SM, LNAV visibility Cat D ½ SM, and Circling visibility Cats B/C ¼ SM.

MISSED APPROACH: Climb to 3000 direct COTAX and via 258° track to BOYER and hold, continue climb-in-hold to 3000.

ATIS 127.1	HARRISBURG APP CON 125.15 257.9	READING TOWER ★ 119.9 (CTAF) 0 288.3	GND CON 121.9	UNICOM 122.95
---------------	------------------------------------	---	------------------	------------------

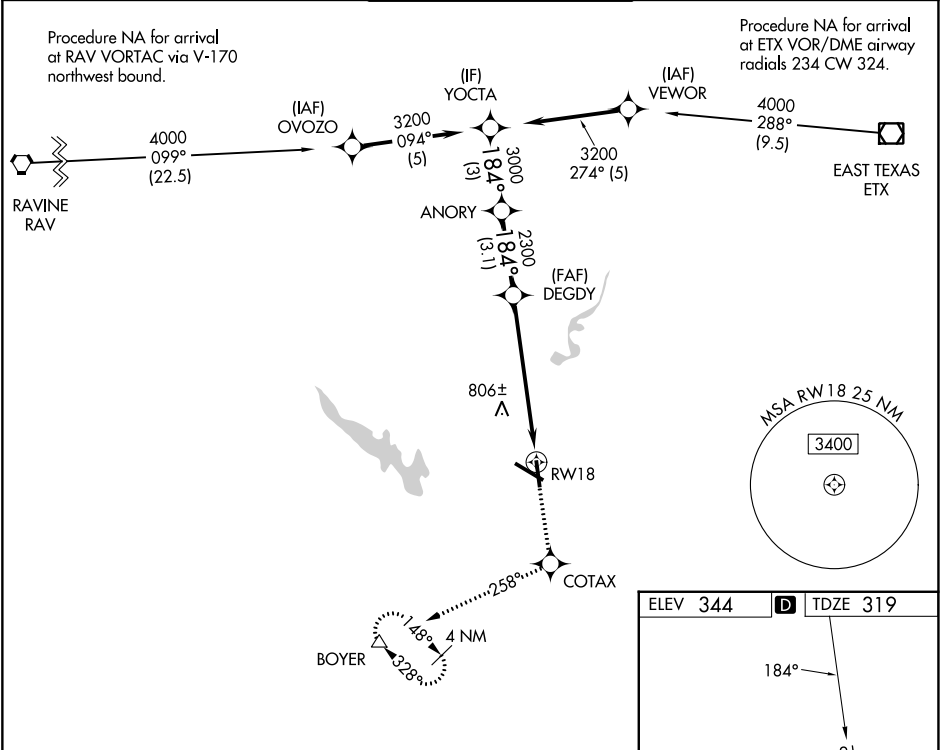

	YOCTA	ANORY	DEGDY	RW18
	3200		2300	
Procedure	Turn			
NA				
	3 NM	3.1 NM	6 NM	
CATEGORY	A	B	C	D
LNAV MDA	980-1	661 (700-1)	980-1 7/8 661 (700-1 7/8)	980-2 661 (700-2)
CIRCLING	1020-1 676 (700-1)	1080-1 736 (800-1)	1280-2 3/4 936 (1000-2 3/4)	1660-3 1316 (1400-3)

