

LOC I-LOW <u>110.7</u>	APP CRS 012°	Rwy Ldg 8400 TDZE 6649 Apt Elev 6649
----------------------------------	------------------------	---

ILS or LOC RWY 1
YELLOWSTONE (WYS)

ADF required. DME required for MUPDE stepdown fix.

NA	Inop table does not apply to S-LOC 1 Cat A. For inop
-19°C	MALSR, increase S-ILS 1 all Cats visibility to 2 ¾ mile.

MALSR




MISSED APPROACH: Climb to 9000, then climbing right turn to 10800 direct TARGY LOM and hold, continue climb-in-hold to 10800.
 *Missed approach requires minimum climb of 300 feet per NM to 10800.

* Missed approach requires minimum climb of 300 feet per NM to 10800.


AWOS-3P
118.1

SALT LAKE CENTER	
132.4	338.3

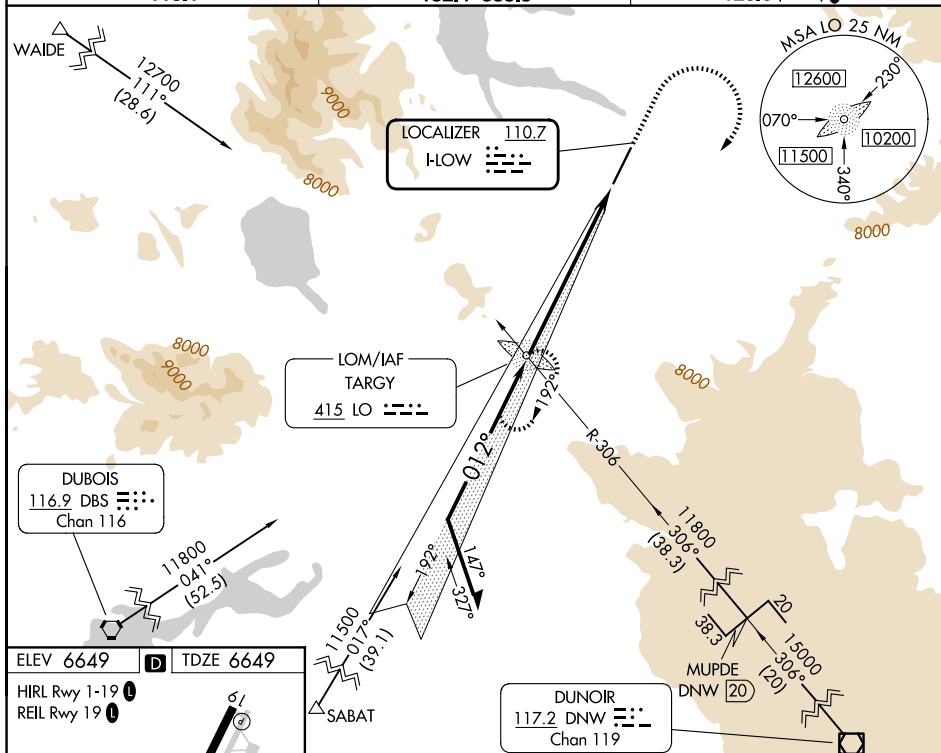UNICOM
123.0 (CTAF) **L**

FILEV 6649		TD7E 6649
------------	---	-----------

HIRL Rwy 1-19 **L**
REIL Rwy 19 **L**

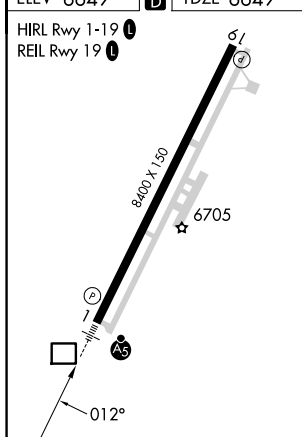

FAF to MAP 6.9 NM

Knots	60	90	120	150	180
Min:Sec	6:54	4:36	3:27	2:46	2:18

Remain within 10 NM

0100

192°

012°

9600

9000

GS 3.00°

TCH 50

LO LOM

8941

9000

10800

TARGY

6.9 NM

CATEGORY	A	B	C	D
S-ILS 1*		6869-1½	220 (300-½)	
S-ILS 1		7449-2¼	800 (800-2¼)	
S-LOC 1	7880-1¼ 1231 (1300-1¼)	7880-1 1231 (1300-1)	7880-2½	1231 (1300-2½)
CIRCLING	7880-1¼ 1231 (1300-1¼)	7880-1½ 1231 (1300-1½)	7880-3 1231 (1300-3)	8020-3 1371 (1400-3)