
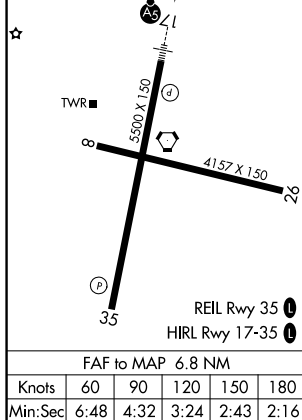


LOC I-OLM 111.9	APP CRS 176°	Rwy Ldg 5500 TDZE 207 Apt Elev 208
---------------------------	------------------------	---

ILS or LOC RWY 17
OLYMPIA RGNL (OLM)

 DME or RADAR required. For inop ALS, increase S-LOC 17 Cat C/D visibility to 1 1/2 SM.	MALSR 	MISSED APPROACH: Climb to 1400 then climb to 5500 on OLM VORTAC R-176 to CETRA INT/OLM 15 DME and hold, continue climb-in-hold to 5500.
---	--	--

ATIS 135.725	SEATTLE APP CON 121.1 290.9	OLYMPIA TOWER* 124.4 (CTAF) 0 254.25	GND CON 121.6	UNICOM 122.95
-----------------	--------------------------------	---	------------------	------------------

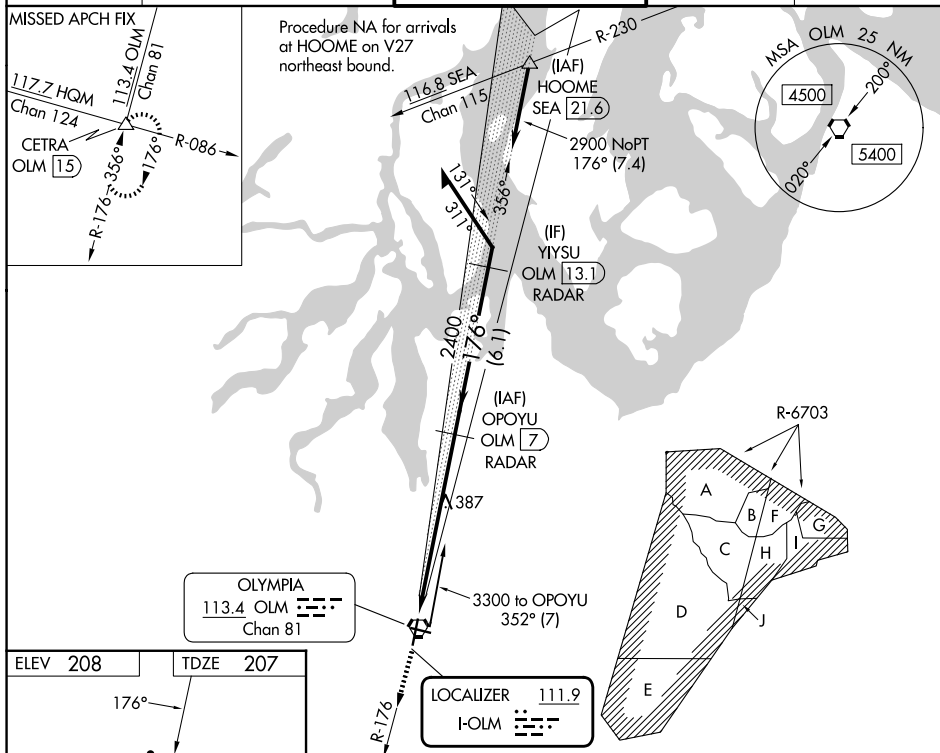

1400 ↑	5500 ↑ OLM R-176	CETRA △	OPOYU OLM (7) RADAR 3300 2400 356° Remain within 10 NM 2900 176° 2400 GS 3.00° TCH 53 6.8 NM			
CATEGORY	A	B	C	D		
S-ILS 17	407-1½ 200 (200-1½)					
S-LOC 17	680-1½ 473 (500-1½)		680-1 473 (500-1)			
CIRCLING	720-1 512 (600-1)	860-1 652 (700-1)	1020-2½ 812 (900-2½)	1020-2¾ 812 (900-2¾)		