RNAV (GPS) Y RWY 36R

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

WAAS	APP CRS	Rwy Ldg	10000
CH 42709	006°	TDZE	896
W36D		Apt Elev	896

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV Cats C and D visibility to 1⅜ SM.

ALSF-2

MISSED APPROACH: Climb to 1500 then climbing right turn to 4000 direct FLM VOR/DME and hold.

D-ATIS	CINCINNATI APP CON	CINCINNATI TOWER	GND CON
134.375	119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)	118.975 360.85 (18L/36R) 118.3 (9/27, 18C/36C) 133.325 (18R/36L)	121.7

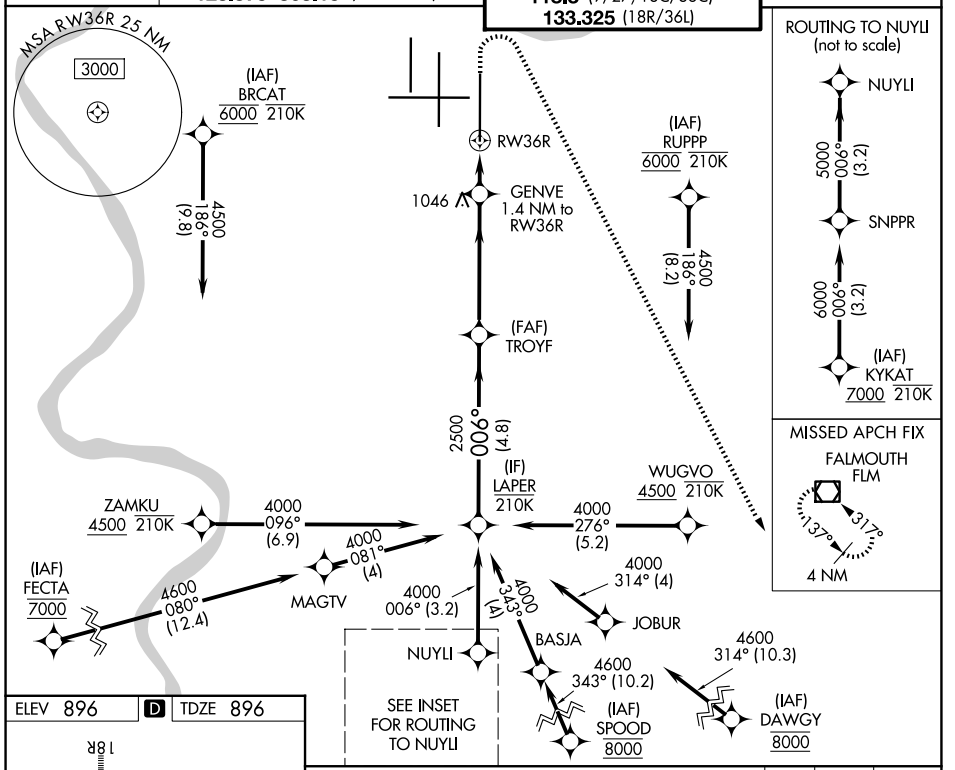

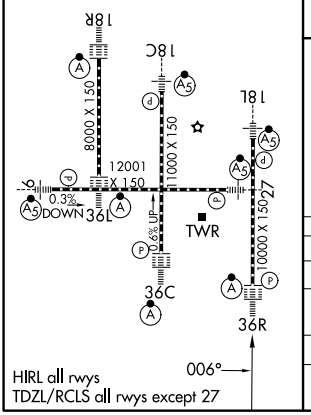

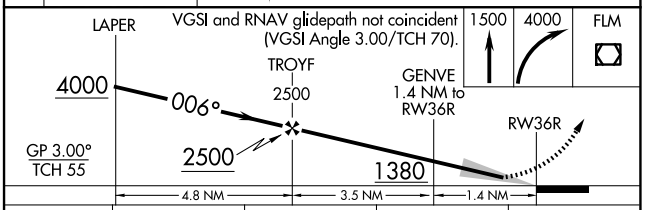

CATEGORY	A	B	C	D
LPV DA	1096/18	200 (200-½)		
LNAV/VNAV DA	1340/45	444 (500-⅞)		
LNAV MDA	1360/24	464 (500-½)	1360/50	464 (500-1)
CIRCLING	1460-1	564 (600-1)	1560-1¾	1560-2
			664 (700-1¾)	664 (700-2)

SE-1, 03 SEP 2026 to 01 OCT 2026
SE-1, 03 SEP 2026 to 01 OCT 2026