
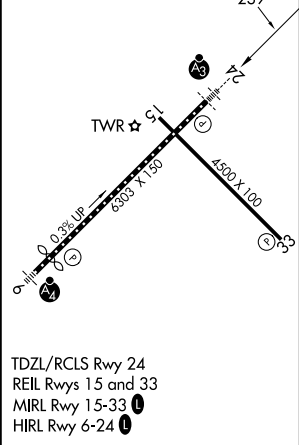


WAAS CH 93612 W24A	APP CRS 239°	Rwy Ldg 6303 TDZE 47 Apt Elev 47
--	------------------------	---

RNAV (GPS) RWY 24

NANTUCKET MEML (ACK)

RNP APCH - GPS.			SSALR	MISSED APPROACH: Climb to 2300 direct UFTAC and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. For inop ALS increase LNAV/VNAV all Cats visibility to RVR 4000 and LNAV Cats C/D visibility to 1½ SM.				
ATIS 127.5	BOSTON APP CON 126.1 318.1	NANTUCKET TOWER ★ 118.3 (CTAF) 0	GND CON 132.5	UNICOM 122.95

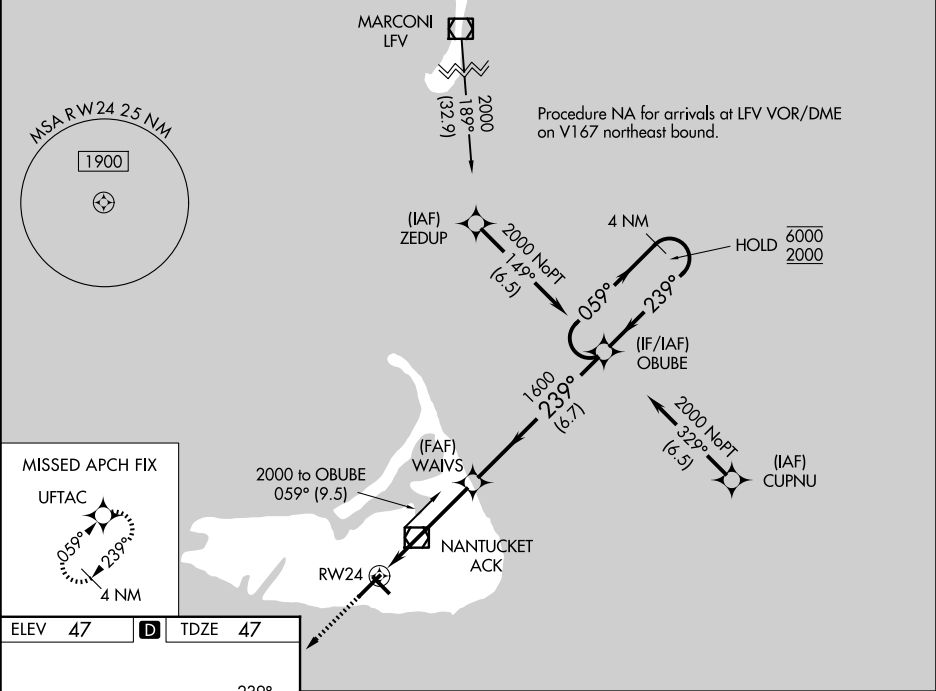

CATEGORY		A	B	C	D
LPV	DA	247/18 200 (200-½)			
LNAV/VNAV	DA	300/24 253 (300-½)			
LNAV	MDA	520/24	473 (500-½)	520/50	473 (500-1)
CIRCLING		520-1	473 (500-1)	720-2 673 (700-2)	720-2¼ 673 (700-2¼)

OBUE

4 NM Holding Pattern

059° 239°

6000 2000

GP 3.00° TCH 47

1.3 NM 3.4 NM 6.7 NM

NE-1, 03 SEP 2026 to 01 OCT 2026

NE-1, 03 SEP 2026 to 01 OCT 2026