RNAV (GPS) RWY 27

BLUE GRASS (LEX)

WAAS	APP CRS	Rwy Ldg	4000
CH 78218	267°	TDZE	974
W27A		Apt Elev	979

Baro-VNAV NA when using Frankfort altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Frankfort altimeter setting: increase LPV DA to 1421 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1450 feet and all visibilitites ¼ SM; increase all MDAs 80 feet and visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 3000 direct OVMAW and hold.

ATIS	LEXINGTON APP CON	LEXINGTON TOWER	GND CON
126.3	120.15 259.3 (040°-220°) 120.75 298.9 (221°-039°)	119.1 257.8	121.9

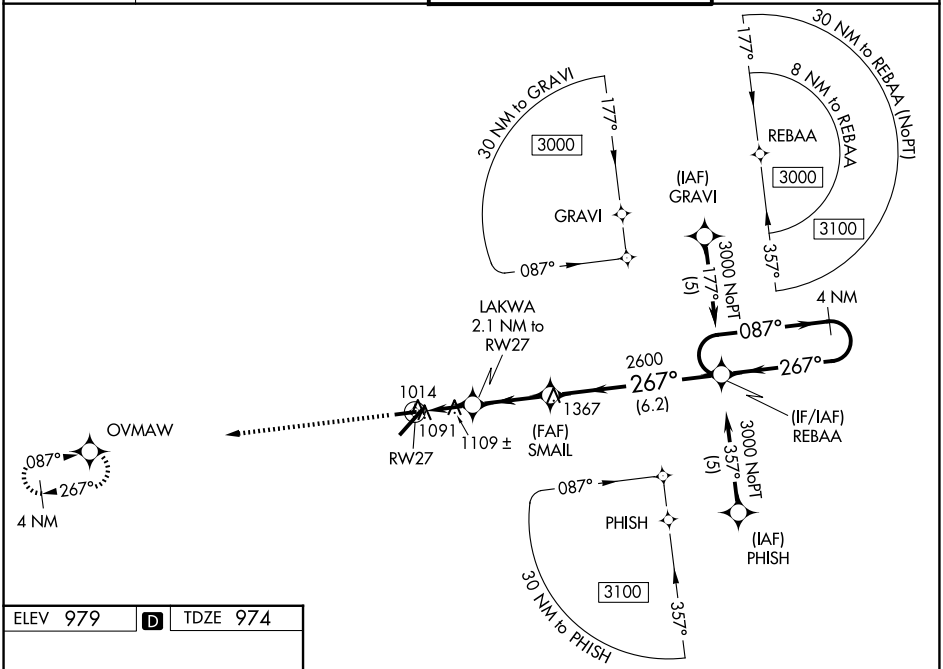

ELEV 979 D TDZE 974



TDZL/RCLS Rwy 4
REIL Rwys 9, 22 and 27
HIRL Rwy 4-22
MIRL Rwy 9-27

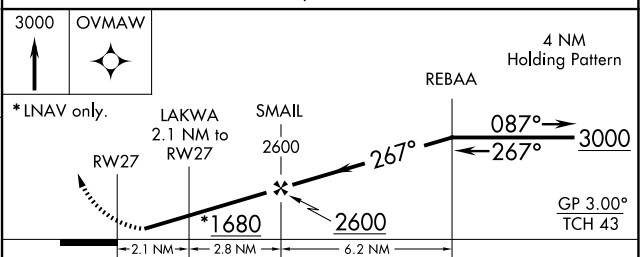

CATEGORY	A	B	C	D
LPV DA	1359-1¼ 385 (400-1¼)			
LNAV/VNAV DA	1388-1⅜ 414 (500-1⅜)			
LNAV MDA	1360-1 386 (400-1)		1360-1⅛ 386 (400-1⅛)	
CIRCLING	1420-1 441 (500-1)	1440-1 461 (500-1)	1520-1½ 541 (600-1½)	1600-2 621 (700-2)

SE-1, 03 SEP 2026 to 01 OCT 2026
SE-1, 03 SEP 2026 to 01 OCT 2026