RNAV (GPS) RWY 9

BLUE GRASS (LEX)

WAAS CH 86918 W09A	APP CRS 087°	Rwy Ldg 4000 / TDZE 967 / Apt Elev 979

RNP APCH - GPS.

Baro-VNAV and VDP NA when using FFT altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use FFT altimeter setting: increase LPV DA to 1279 feet; increase LNAV/VNAV DA to 1421 feet; increase all MDAs 80 feet and LNAV visibility Cat C ¼ SM, LNAV visibility Cat D ⅛ SM, and Circling visibility Cats C/D ¼ SM.

MISSED APPROACH: Climb to 3000 direct REBAA and hold.

ATIS	LEXINGTON APP CON	LEXINGTON TOWER	GND CON
126.3	120.15 259.3 (040°-220°) 120.75 298.9 (221°-039°)	119.1 257.8	121.9

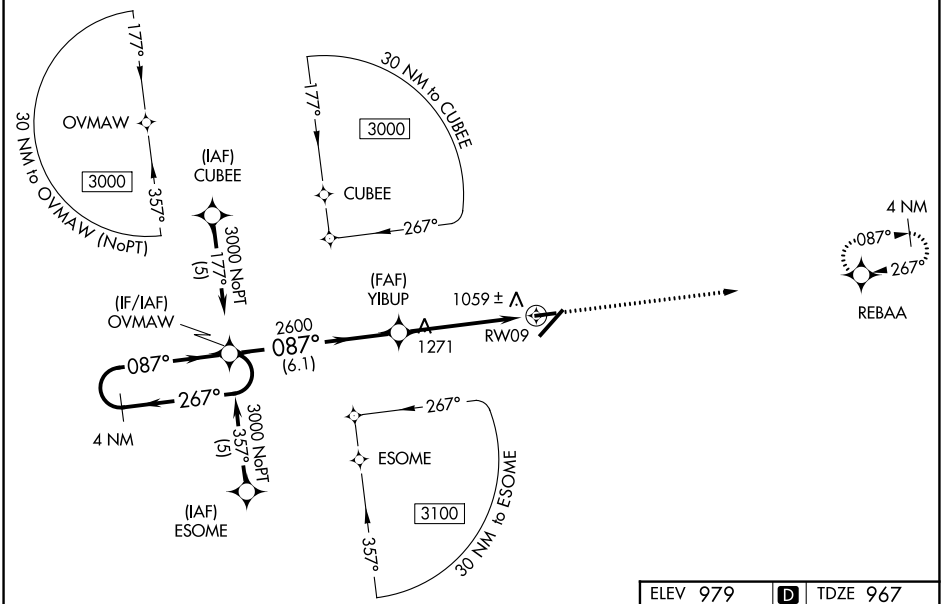

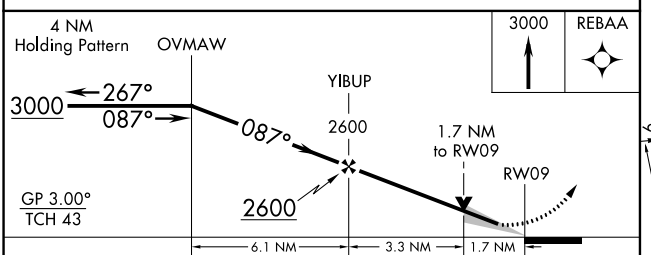

CATEGORY	A	B	C	D
LPV DA	1217-1	250 (300-1)		
LNAV/VNAV DA	1359-1½	392 (400-1½)		
LNAV MDA	1540-1 573 (600-1)		1540-1⅝ 573 (600-1⅝)	1540-1¾ 573 (600-1¾)
CIRCLING	1540-1 561 (600-1)		1540-1½ 561 (600-1½)	1600-2 621 (700-2)

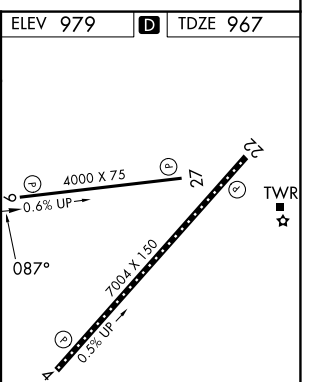

TDZL/RCLS Rwy 4
REIL Rwys 9, 22 and 27
HIRL Rwy 4-22
MIRL Rwy 9-27

SE-1, 03 SEP 2026 to 01 OCT 2026
SE-1, 03 SEP 2026 to 01 OCT 2026