

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>58311</b><br><b>W04A</b> | APP CRS<br><b>041°</b> | Rwy Ldg<br>TDZE <b>751</b><br>Apt Elev <b>755</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 4

UNIVERSITY OF ILLINOIS/WILLARD (CMI)


⚠

ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). When local altimeter setting not received, use Rantoul altimeter setting and increase all DA 41 feet, and all MDA 60 feet. Increase LNAV Cat D visibility ¼ mile. DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Rantoul altimeter setting.

MISSED APPROACH: Climb to 2800 direct MUGTE and hold.

|                       |                                                                                              |                                                         |                         |                         |
|-----------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------------|-------------------------|-------------------------|
| ATIS<br><b>124.85</b> | CHAMPAIGN APP CON ★<br><b>121.35 285.65</b> (319°-138°)<br><b>132.85 290.225</b> (139°-318°) | CHAMPAIGN TOWER ★<br><b>120.4</b> (CTAF) <b>0 229.4</b> | GND CON<br><b>121.8</b> | UNICOM<br><b>122.95</b> |
|-----------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------------|-------------------------|-------------------------|

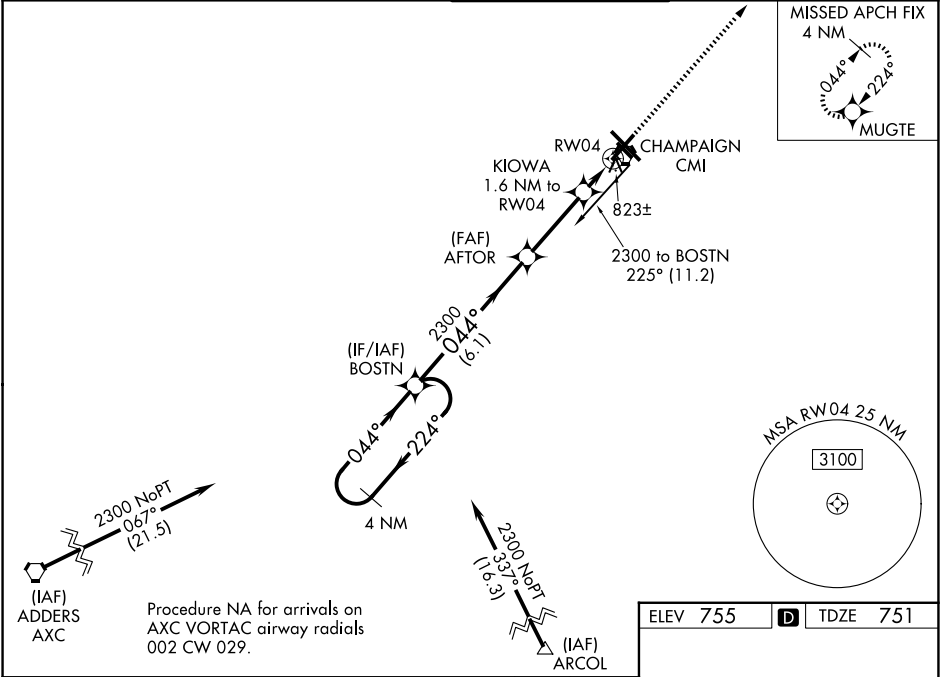

|                      |         |             |                         |                         |            |
|----------------------|---------|-------------|-------------------------|-------------------------|------------|
| 4 NM Holding Pattern |         | BOSTN       | AFTOR                   | KIOWA 1.6 NM to RW04    | 2800 MUGTE |
| 2300 ← 224°          |         | 044° →      | 2300                    | * LNAV only             |            |
| GP 3.00° TCH 42      |         | 2300        | * 1280                  | * 0.9 NM to RW04        |            |
| 6.1 NM               |         | 3.1 NM      | 0.7 NM                  | 0.9                     |            |
| CATEGORY             | A       | B           | C                       | D                       |            |
| LPV DA               | 1001-1  |             | 250 (300-1)             |                         |            |
| LNAV/VNAV DA         | 1083-1¼ |             | 332 (400-1¼)            |                         |            |
| LNAV MDA             | 1080-1  |             | 329 (400-1)             |                         |            |
| CIRCLING             | 1240-1  | 485 (500-1) | 1500-2¼<br>745 (800-2¼) | 1500-2½<br>745 (800-2½) |            |

HIRL Rwy 14L-32R

MIRL Rwy 4-22

MIRL Rwy 14R-32L