WAAS CH 86912 W10A	APP CRS 094°	Rwy Ldg 6006 TDZE 631 Apt Elev 649

RNAV (GPS) RWY 10

SOUTHWEST MICHIGAN RGNL (BEH)

RNP APCH - GPS.

Rwy 10 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Baro-VNAV and VDP NA when using LWA altimeter setting. When local altimeter setting not received, use LWA altimeter setting: increase LPV DA to 917 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 1080 feet and all visibilities ¼ SM; increase all MDAs 40 feet and LNAV visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 2500 direct GIDPE and hold.

ASOS	SOUTH BEND APP CON★	CLNC DEL	UNICOM
121.55	118.55 257.8	119.7	123.0 (CTAF) L

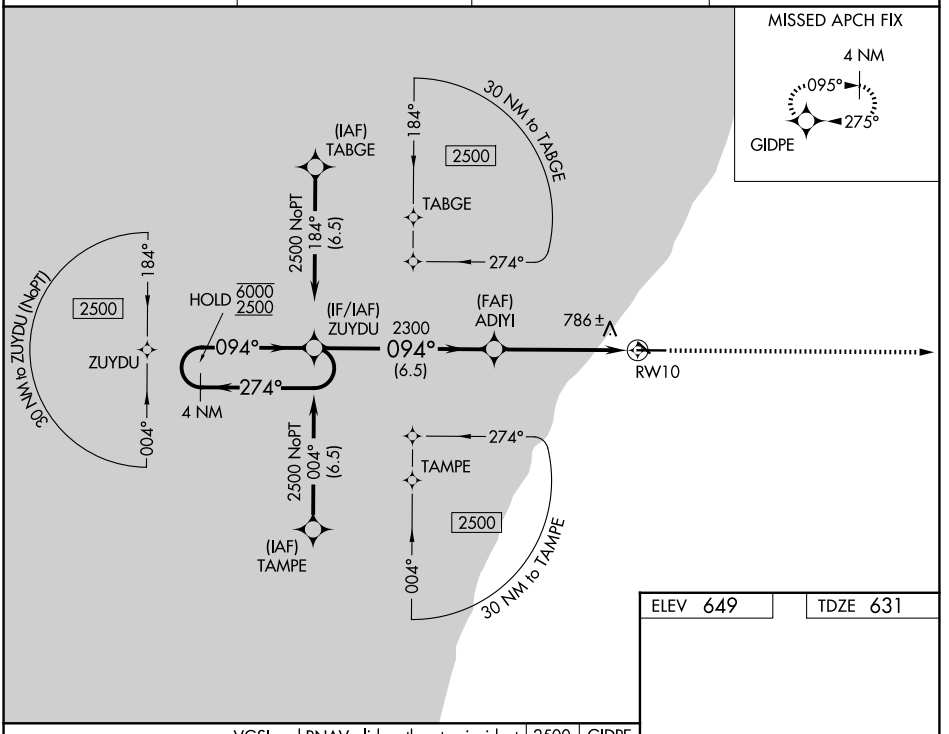

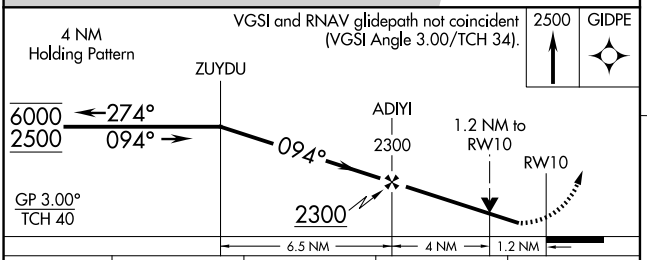

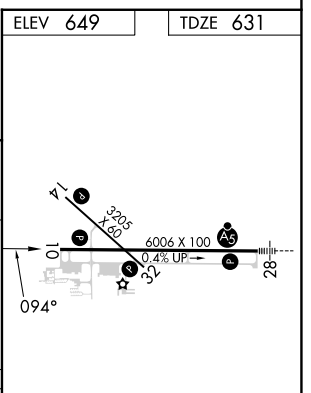

CATEGORY	A	B	C	D
LPV DA	881-¾ 250 (300-¾)			
LNAV/VNAV DA	1040-1⅛ 409 (400-1⅛)			
LNAV MDA	1040-1 409 (400-1)		1040-1⅛ 409 (400-1⅛)	

REIL Rwys 10, 14 and 32 L
MIRL Rwy 14-32 L
HIRL Rwy 10-28 L

EC-1, 03 SEP 2026 to 01 OCT 2026
EC-1, 03 SEP 2026 to 01 OCT 2026